

SHUT-OFF VALVES FOR REFRIGERATION

AVR, AVB, AVR MAV

05.02.2026

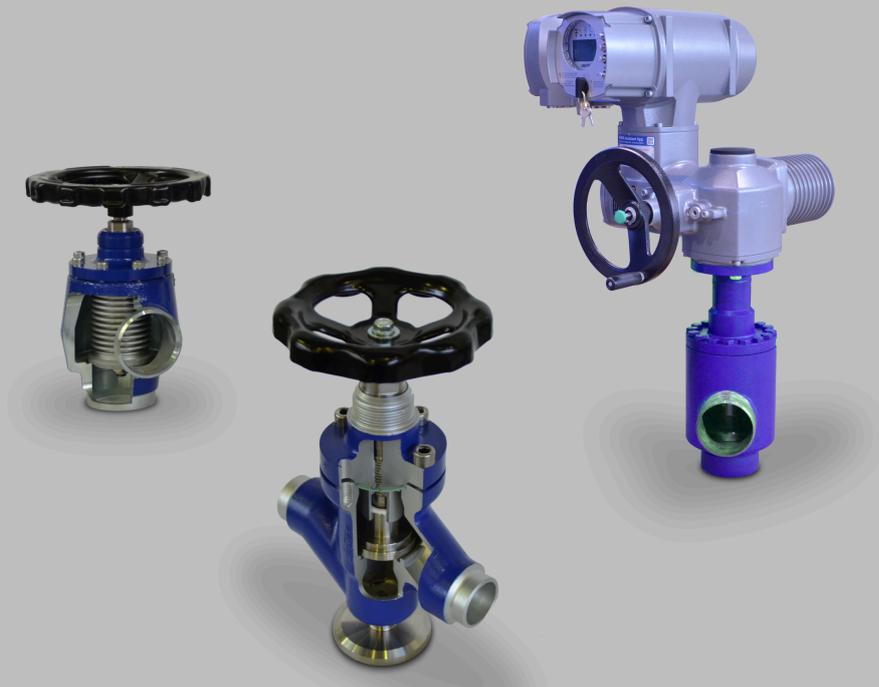


Table of contents

1 AVR / AVB.....	5
2 AVR / AVB.....	7
3 AVR materials.....	8
4 AVR D AE / AVR D AE DV.....	10
5 AVR D AE NIRO / AVR D AE DV NIRO	12
6 AVR E AE / AVR E AE DV	14
7 AVR E AE NIRO / AVR E AE DV NIRO.....	16
8 AVR D FL / AVR D FL DV	18
9 AVR D FL NIRO / AVR D FL DV NIRO.....	20
10 AVR E FL / AVR E FL DV	22
11 AVR E FL NIRO / AVR E FL DV NIRO	24
12 AVR D LE / AVR D LE DV	26
13 AVR D LE NIRO / AVR D LE DV NIRO.....	28
14 AVR E LE / AVR E LE DV.....	30
15 AVR E LE NIRO / AVR E LE DV NIRO	32
16 AVR D SE / AVR D SE DV	34
17 AVR D SE NIRO / AVR D SE DV NIRO	35
18 AVR E SE / AVR E SE DV	36
19 AVR E SE NIRO / AVR E SE DV NIRO.....	37
20 AVR D AE	38
21 AVR D AE NIRO	39
22 AVR E AE	40
23 AVR E AE NIRO.....	41
24 AVR D LE	42
25 AVR D LE NIRO.....	43
26 AVR E LE.....	44
27 AVR E LE NIRO.....	45
28 AVR MAV D AE DV.....	46
29 AVR MAV D AE DV NIRO	47
30 AVR MAV D AE DV.....	48
31 AVR MAV D AE DV NIRO	49

32 AVR MAV E AE DV	50
33 AVR MAV E AE DV NIRO	52
34 AVR MAV D AE DV.....	54
35 AVR MAV D AE DV NIRO	56
36 AVR MAV E AE DV	58
37 AVR MAV E AE DV NIRO	60
38 AVB materials.....	62
39 AVB D AE / AVB D AE DV	64
40 AVB D AE NIRO / AVB D AE DV NIRO	66
41 AVB E AE / AVB E AE DV	68
42 AVB E AE NIRO / AVB E AE DV NIRO.....	70
43 AVB D FL / AVB D FL DV	72
44 AVB D FL NIRO / AVB D FL DV NIRO.....	74
45 AVB E FL / AVB E FL DV	76
46 AVB E FL NIRO / AVB E FL DV NIRO	78
47 AVB D LE / AVB D LE DV	80
48 AVB D LE NIRO / AVB D LE DV NIRO.....	82
49 AVB E LE / AVB E LE DV.....	84
50 AVB E LE NIRO / AVB E LE DV NIRO	86
51 Appendix	88
52 Pilot valve disc	89
53 Valve stem sealing system	90
54 Handwheel / Cap	91
55 Comparison of European / American materials	93
56 Coding of connections for small and service valves.....	94
57 Accessories for AVR, HRAR, RV, RVA, RVAK, SS, UVA	97
58 Welding neck flanges - DIN 2634/2635	98
59 Welding neck flanges - DIN 2634/2636/2637	100
60 Welding neck flanges - DIN EN 1092-1.....	102
61 Welding neck flanges - DIN EN 1092-1.....	104
62 Welding neck flanges - ANSI B16.5 raised face	106
63 Welding neck flanges - AWP.....	108
64 Legal notices.....	109

1 AVR / AVB

AVR / AVB

AVR: Shut-off valves - stem seal threaded bush with spring-energised PTFE ring

AVR	Connection	Form	Material	Valve type
AVR	Materials			
AVR PS25 / PS40 / PS63	Welding ends	Straight-way	St	AVR D AE / DV
			NIRO	AVR D AE NIRO / DV
		Angle	St	AVR E AE / DV
			NIRO	AVR E AE NIRO / DV
	Flanged ends	Straight-way	St	AVR D FL / DV
			NIRO	AVR D FL NIRO / DV
		Angle	St	AVR E FL / DV
			NIRO	AVR E FL NIRO / DV
	Soldering ends	Straight-way	St	AVR D LE / DV
			NIRO	AVR D LE NIRO / DV
		Angle	St	AVR E LE / DV*
			NIRO	AVR E LE NIRO / DV
	Screwed ends	Straight-way	St	AVR D SE / DV
			NIRO	AVR D SE NIRO / DV
		Angle	St	AVR E SE / DV
			NIRO	AVR E SE NIRO / DV
AVR PS160	Welding ends	Straight-way	St	AVR D AE
			NIRO	AVR D AE NIRO
		Angle	St	AVR E AE
			NIRO	AVR E AE NIRO
	Soldering ends	Straight-way	St	AVR D LE
			NIRO	AVR D LE NIRO
		Angle	St	AVR E LE
			NIRO	AVR E LE NIRO
AVR MAV J+J PS25 / PS40 / PS63	Welding ends	Straight-way	St	AVR MAV D AE DV
			NIRO	AVR MAV D AE DV NIRO
			St	AVR MAV D AE DV
			NIRO	AVR MAV D AE DV NIRO
		Angle	St	AVR MAV D AE DV
			NIRO	AVR MAV D AE DV NIRO
			St	AVR MAV D AE DV
			NIRO	AVR MAV D AE DV NIRO
AVR MAV PS25 / PS40 / PS63	Welding ends	Straight-way	St	AVR MAV D AE DV
			NIRO	AVR MAV D AE DV NIRO
		Angle	St	AVR MAV E AE DV
			NIRO	AVR MAV E AE DV

AVR	Connection	Form	Material	Valve type
			NIRO	AVR MAV E AE DV NIRO

DV = optional bonnet extension, St = steel NIRO = stainless steel

2 AVR / AVB


AVB: Shut-off valves - stem seal metal bellows and threaded bush

AVB	Connection	Form	Material	Valve type
AVB	Materials			
AVB PS25-PS40	Welding ends	Straight-way	St	AVB D AE / DV
			NIRO	AVB D AE NIRO / DV
		Angle	St	AVB E AE / DV
			NIRO	AVB E AE NIRO / DV
	Flanged ends	Straight-way	St	AVB D FL / DV
			NIRO	AVB D FL NIRO / DV
		Angle	St	AVB E FL / DV
			NIRO	AVB E FL NIRO / DV
	Soldering ends	Straight-way	St	AVB D LE / DV
			NIRO	AVB D LE NIRO / DV
		Angle	St	AVB E LE / DV
			NIRO	AVB E LE NIRO / DV
Information	Pilot valve disc			
	Valve stem sealing system			
	Insulation thicknesses			
	HR / K Handwheel / Cap			
	Comparison of European/American materials			
	Coding of connections for small and service valves			
	Accessories/fittings for AVR, HRAR, RV, RVA, RVAK, SS, UVA			
	DIN-FL welding neck flanges - DIN			
	DIN-FL welding neck flanges - DIN			
	ANSI-FL welding neck flanges - smooth			
	AWP-FL welding neck flanges - AWP			
	Legal notices			

DV = optional bonnet extension, St = steel NIRO = stainless steel

3 AVR materials

Designation and materials

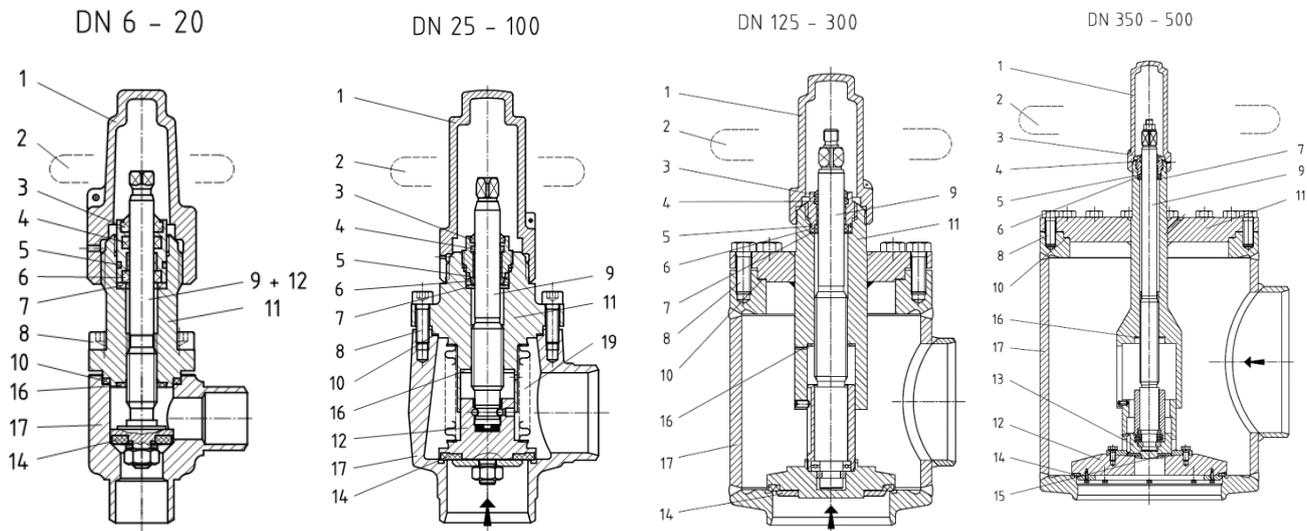

Part	Material for steel valves	Material for stainless steel valves
1 Cap	Aluminium AISi10Mg	Aluminium AISi10Mg
2 Handwheel	Steel	Steel
3 Wiper ring	NBR	NBR
4 O-ring A	CR, NBR, HNBR, EPDM, FPM*	CR, NBR, HNBR, EPDM, FPM*
5 O-ring B	CR, NBR, HNBR, EPDM, FPM*	CR, NBR, HNBR, EPDM, FPM*
6 Spring-loaded U-ring	PTFE	PTFE
7 Flat sealing ring for threaded bush	AFM30	AFM30
8 Bonnet screw	8.8	A2-70
9 Stem	X8CrNiS18-9 1.4305	X8CrNiS18-9 1.4305
10 Flat sealing ring for bonnet	AFM30	AFM30
11 Bonnet	S355J2 1.0577	X8CrNiS18-9 1.4305 X5CrNi18-10 1.4301 X2CrNi19-11 1.4306
12 Valve disc	S355J2 1.0577	X8CrNiS18-9 1.4305
13 Pilot valve disc	S355J2 1.0577	X8CrNiS18-9 1.4305
14 Flat sealing ring for valve disc	PTFE	PTFE
15 Flat sealing ring for pilot valve disc	PTFE	PTFE
16 Back seal	PTFE	PTFE
17 Body	P235GH 1.0345	X5CrNi18-10 1.4301


Part	Material for steel valves	Material for stainless steel valves
	S355J2 1.0577 P355N 1.0562 G20Mn5 +QT	GX5CrNiMoNb19-11-2

* depending on the refrigerant used

4 AVR D AE / AVR D AE DV

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

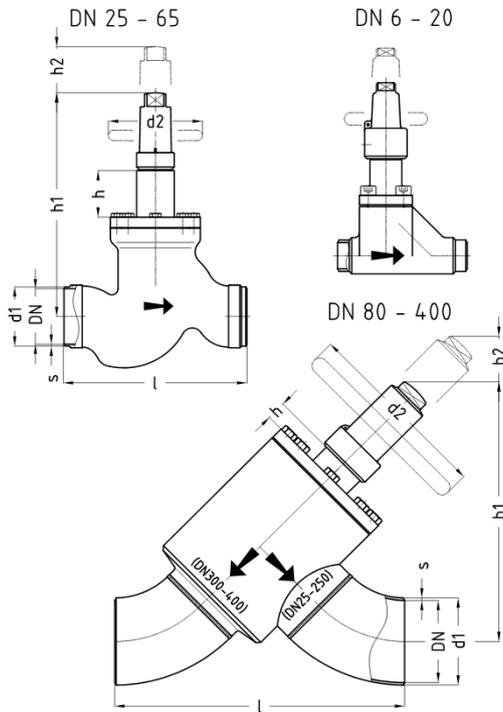

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	43/63*	PS [bar]
DN 300...350 12" ...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400 16"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

*only from DN80

Nominal size:		Welding ends acc. to:						PN63, DN6-15:									
		ISO Series 1			ISO Series 2		ANSI Sched 40		ANSI Sched 80		Dimensions l to d2 same as for DN20						
DN	INCH	d1	s1)	s2)	d1	s	d1	s	d1	s	l	h	h*)	h1	h1*)	h2	d2
6	1/8"	10.2	1.6	1.6			10.3	1.7	10.3	2.4	84	22	54	128	160	35	60

Nominal size:	Welding ends acc. to:						PN63, DN6-15:										
8	1/4"	13.5	1.8	1.8			13.7	2.2	13.7	3.0	84	22	54	128	160	35	60
10	3/8"	17.2	1.8	1.8	15.0	2.5	17.1	2.3	17.1	3.2	84	22	54	128	160	35	60
15	1/2"	21.3	2.0	2.0	20.0	2.5	21.3	2.8	21.3	3.7	84	22	54	128	160	35	60
20	3/4"	26.9	2.3	2.6	25.0	2.5	26.7	2.9	26.7	3.9	110	31	68	148	185	45	60
25	1"	33.7	2.6	2.6	32.0	3.0	33.4	3.4	33.4	4.5	160	18	78	201	261	90	120
32	1 1/4"	42.4	2.6	2.9	38.0	3.0	42.2	3.6	42.2	4.8	180	18	78	202	262	90	120
40	1 1/2"	48.3	2.6	2.9	45.0	3.0	48.3	3.7	48.3	5.1	200	13	73	234	294	110	140
50	2"	60.3	2.9	2.9	57.0	3.2	60.3	3.9			230	13	73	234	294	110	140
65	2 1/2"	76.1	2.9	3.2	76.1	3.6	73.0	5.2			290	8	78	262	332	130	140
80	3"	88.9	3.2	3.6	88.9	4.0	88.9	5.5			304	21	78	326	367	110	180
100	4"	114.3	3.6	4.0	108.0	4.0	114.3	6.0			386	7	88	348	405	110	180
125	5"	139.7	4.0	4.5	133.0	4.0	141.3	6.6			461	29	129	420	491	140	300
150	6"	168.3	4.5	5.6	159.0	4.5	168.3	7.1			537	5	105	437	508	150	400
200	8"	219.1	6.3	7.1			219.1	8.2			708	11	102	610	675	170	630
250	10"	273.0	7.1	8.8			273.0	9.3			875	100		739		220	630
300	12"	323.9	8.0				323.8	10.3			1048	107		829		280	630
350	14"	355.6	8.0				355.6	11.1			1215	107		906		350	630
400	16"	406.4	8.8				406.4	12.7			1380	112		1047		360	630


Table 1: Dimensions

1) PN25 / PN40 2) PN63 *) for valves with bonnet extension, h2 = dismantling dimension

5 AVR D AE NIRO / AVR D AE DV NIRO

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

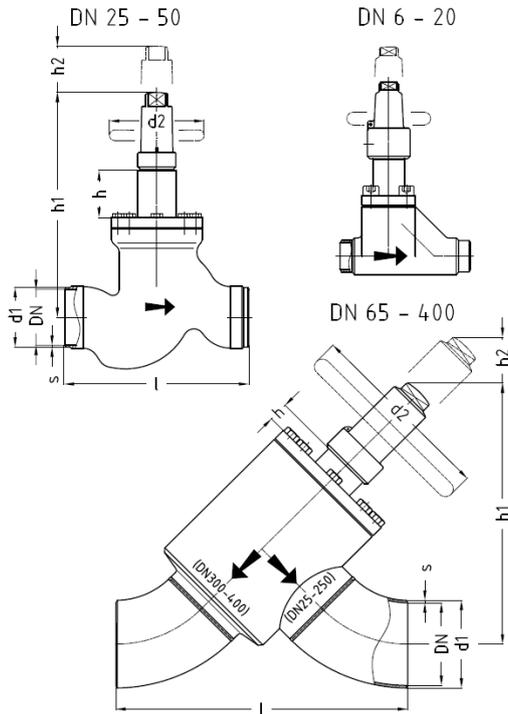

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	50.2/63*	PS [bar]
DN 300...350 12" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400 16"	PN25	25	25	25	25	PS [bar]

*only from DN65

Nominal size:		Welding ends acc. to:					PN40/PN63, DN6-15:										
		ISO Series 1			ISO Series 2		ANSI Sched 40		ANSI Sched 80		Dimensions l to d2 same as for DN20						
DN	INCH	d1	s1)	s2)	d1	s	d1	s	d1	s	l	h	h*)	h1	h1*)	h2	d2
6	1/8"	10.2	1.6	1.6			10.3	1.7	10.3	2.4	84	22	54	128	160	35	60

Nominal size:	Welding ends acc. to:						PN40/PN63, DN6-15:										
8	1/4"	13.5	1.8	1.8			13.7	2.2	13.7	3.0	84	22	54	128	160	35	60
10	3/8"	17.2	1.8	1.8	15.0	2.5	17.1	2.3	17.1	3.2	84	22	54	128	160	35	60
15	1/2"	21.3	2.0	2.0	20.0	2.5	21.3	2.8	21.3	3.7	84	22	54	128	160	35	60
20	3/4"	26.9	2.3	2.6	25.0	2.5	26.7	2.9	26.7	3.9	110	31	68	148	185	45	60
25	1"	33.7	2.6	2.6	32.0	3.0	33.4	3.4	33.4	4.5	160	18	78	201	261	90	120
32	1 1/4"	42.4	2.6	2.9	38.0	3.0	42.2	3.6	42.2	4.8	180	18	78	202	262	90	120
40	1 1/2"	48.3	2.6	2.9	45.0	3.0	48.3	3.7	48.3	5.1	200	13	73	234	294	110	140
50	2"	60.3	2.9	2.9	57.0	3.2	60.3	3.9			230	13	73	234	294	110	140
65	2 1/2"	76.1	2.9	3.2	76.1	3.6	73.0	5.2			256	8	78	248	298	100	140
80	3"	88.9	3.2	3.6	88.9	4.0	88.9	5.5			304	21	78	326	367	110	180
100	4"	114.3	3.6	4.0	108.0	4.0	114.3	6.0			386	7	88	348	405	110	180
125	5"	139.7	4.0	4.5	133.0	4.0	141.3	6.6			461	29	129	420	491	140	300
150	6"	168.3	4.5	5.6	159.0	4.5	168.3	7.1			537	5	105	437	508	150	400
200	8"	219.1	6.3	7.1			219.1	8.2			708	11	102	610	675	170	630
250	10"	273.0	7.1	8.8			273.0	9.3			875	100		739		220	630
300	12"	323.9	8.0				323.8	10.3			1048	107		829		280	630
350	14"	355.6	8.0				355.6	11.1			1215	107		906		350	630
400	16"	406.4	8.8				406.4	12.7			1380	112		1047		360	630


Table 2: Dimensions

1) PN25 / PN40 2) PN63 *) for valves with bonnet extension, h2 = dismantling dimension

6 AVR E AE / AVR E AE DV

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

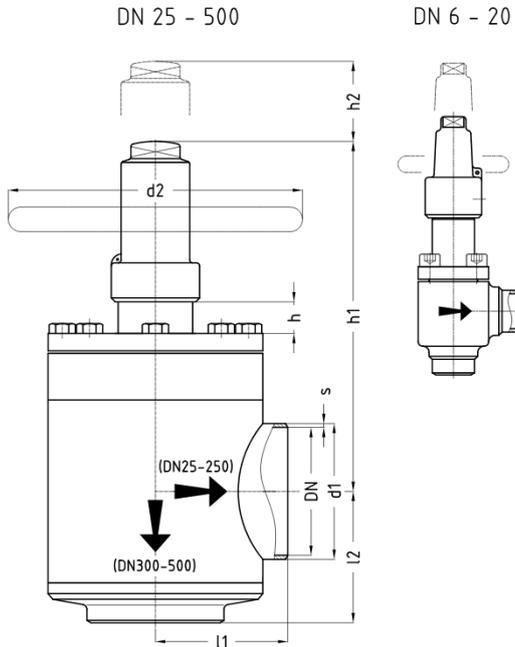

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 300...350 12" ...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400...500 16" ...20"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:		Welding ends acc. to:				PN63, DN6-15:												
		ISO Series 1			ISO Series 2		ANSI Sched 40		ANSI Sched 80		Dimensions l1 to d2 same as for DN20							
DN	INCH	d1	s1)	s2)	d1	s	d1	s	d1	s	l1	l2	h	h*)	h1	h1*)	h2	d2
6	1/8"	10.2	1.6	1.6			10.3	1.7	10.3	2.4	35	35	22	54	110	143	35	60

Nominal size:		Welding ends acc. to: PN63, DN6-15:																
8	1/4"	13.5	1.8	1.8			13.7	2.2	13.7	3.0	35	35	22	54	110	143	35	60
10	3/8"	17.2	1.8	1.8	15.0	2.5	17.1	2.3	17.1	3.2	35	35	22	54	110	143	35	60
15	1/2"	21.3	2.0	2.0	20.0	2.5	21.3	2.8	21.3	3.7	35	35	22	54	110	143	35	60
20	3/4"	26.9	2.3	2.6	25.0	2.5	26.7	2.9	26.7	3.9	41	41	31	68	125	162	45	60
25	1"	33.7	2.6	2.6	32.0	3.0	33.4	3.4	33.4	4.5	60	60	18	78	180	240	90	120
32	1 1/4"	42.4	2.6	2.9	38.0	3.0	42.2	3.6	42.2	4.8	60	60	18	78	180	240	90	120
40	1 1/2"	48.3	2.6	2.9	45.0	3.0	48.3	3.7	48.3	5.1	70	70	13	73	205	265	110	140
50	2"	60.3	2.9	2.9	57.0	3.2	60.3	3.9			70	70	13	73	205	265	110	140
65	2 1/2"	76.1	2.9	3.2	76.1	3.6	73.0	5.2			85	85	8	78	212	282	130	140
80	3"	88.9	3.2	3.6	88.9	4.0	88.9	5.5			100	100	21	78	291	350	150	180
100	4"	114.3	3.6	4.0	108.0	4.0	114.3	6.0			120	120	7	88	287	368	150	180
125	5"	139.7	4.0	4.5	133.0	4.0	141.3	6.6			135	135	29	129	360	456	190	300
150	6"	168.3	4.5	5.6	159.0	4.5	168.3	7.1			150	150	5	105	352	452	210	400
200	8"	219.1	6.3	7.1			219.1	8.2			195	195	11	102	513	608	240	630
250	10"	273.0	7.1	8.8			273.0	9.3			236	236	100		626		300	630
300	12"	323.9	8.0				323.8	10.3			283	283	107		673		385	630
350	14"	355.6	8.0				355.6	11.1			325	325	107		708		485	630
400	16"	406.4	8.8				406.4	12.7			365	365	112		832		500	630
450	18"	457.0	8.8				457.0	14.3			465	465	132		960		700	630
500	20"	508.0	10.0				508.0	15.1			465	465	132		960		700	630


Table 3: Dimensions

1) PN25 / PN40 2) PN63 *) for valves with bonnet extension, h2 = dismantling dimension

7 AVR E AE NIRO / AVR E AE DV NIRO

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

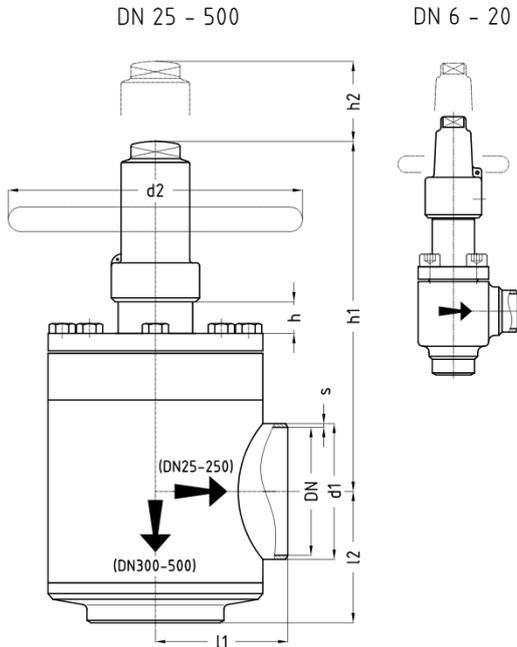

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	50.2/63*	PS [bar]
DN 300...350 12" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400 16"	PN25	25	25	25	25	PS [bar]

Nominal size:		Welding ends acc. to:				PN40/PN63, DN6-15:												
		ISO Series 1			ISO Series 2		ANSI Sched 40		ANSI Sched 80		Dimensions l1 to d2 same as for DN20							
DN	INCH	d1	s1)	s2)	d1	s	d1	s	d1	s	l1	l2	h	h*)	h1	h1*)	h2	d2
6	1/8"	10.2	1.6	1.6			10.3	1.7	10.3	2.4	35	35	22	54	110	143	35	60

Nominal size:	Welding ends acc. to: PN40/PN63, DN6-15:																	
8	1/4"	13.5	1.8	1.8			13.7	2.2	13.7	3.0	35	35	22	54	110	143	35	60
10	3/8"	17.2	1.8	1.8	15.0	2.5	17.1	2.3	17.1	3.2	35	35	22	54	110	143	35	60
15	1/2"	21.3	2.0	2.0	20.0	2.5	21.3	2.8	21.3	3.7	35	35	22	54	110	143	35	60
20	3/4"	26.9	2.3	2.6	25.0	2.5	26.7	2.9	26.7	3.9	41	41	31	68	125	162	45	60
25	1"	33.7	2.6	2.6	32.0	3.0	33.4	3.4	33.4	4.5	60	60	18	78	180	240	90	120
32	1 1/4"	42.4	2.6	2.9	38.0	3.0	42.2	3.6	42.2	4.8	60	60	18	78	180	240	90	120
40	1 1/2"	48.3	2.6	2.9	45.0	3.0	48.3	3.7	48.3	5.1	70	70	13	73	205	265	110	140
50	2"	60.3	2.9	2.9	57.0	3.2	60.3	3.9			70	70	13	73	205	265	110	140
65	2 1/2"	76.1	2.9	3.2	76.1	3.6	73.0	5.2			85	85	8	78	212	282	130	140
80	3"	88.9	3.2	3.6	88.9	4.0	88.9	5.5			100	100	21	78	291	350	150	180
100	4"	114.3	3.6	4.0	108.0	4.0	114.3	6.0			120	120	7	88	287	368	150	180
125	5"	139.7	4.0	4.5	133.0	4.0	141.3	6.6			135	135	29	129	360	456	190	300
150	6"	168.3	4.5	5.6	159.0	4.5	168.3	7.1			150	150	5	105	352	452	210	400
200	8"	219.1	6.3	7.1			219.1	8.2			195	195	11	102	513	608	240	630
250	10"	273.0	7.1	8.8			273.0	9.3			236	236	100		626		300	630
300	12"	323.9	8.0				323.8	10.3			283	283	107		673		385	630
350	14"	355.6	8.0				355.6	11.1			325	325	107		708		485	630
400	16"	406.4	8.8				406.4	12.7			365	365	112		832		500	630
450	18"	457.0	8.8				457.0	14.3			465	465	132		960		700	630
500	20"	508.0	10.0				508.0	15.1			465	465	132		960		700	630


Table 4: Dimensions

1) PN25 / PN40 2) PN63 *) for valves with bonnet extension, h2 = dismantling dimension

8 AVR D FL / AVR D FL DV

D: Straight-way, **FL:** Flanged ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

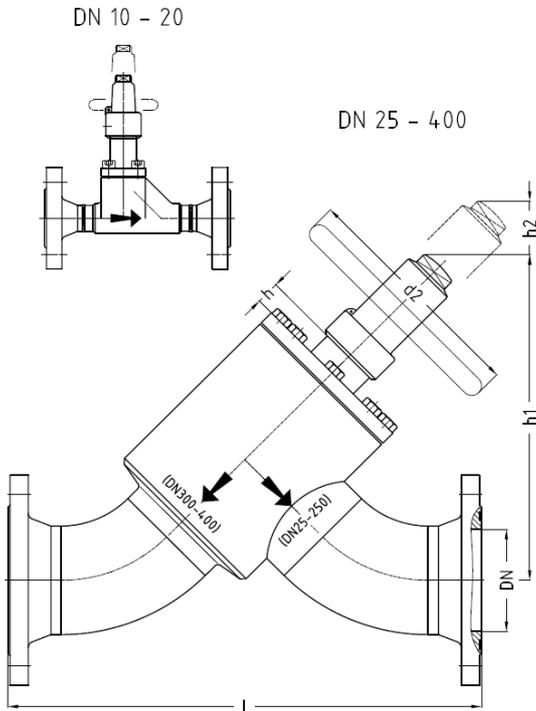

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 300...350 12" ...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400 16"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:		Flanged ends acc. to:					PN63, DN10-15:					
		AWP DN10-20 PN25 DN25-80 PN40	PN25 DIN 2634 EN1092-1	PN40 DIN 2635 EN1092-1	PN63 DIN 2636 EN1092-1	ANSI 300 RF	Dimensions h to d2 same as for DN20					
DN	INCH	l	l	l	l	l / l1)	h	h*)	h1	h1*)	h2	d2

Nominal size:		Flanged ends acc. to:					PN63, DN10-15:					
10	3/8"	149	156	156	202		22	54	128	160	35	60
15	1/2"	149	162	162	202	192/218	22	54	128	160	35	60
20	3/4"	175	192	192	208	228	31	68	148	185	45	60
25	1"	230	222	222	258	266	18	78	188	231	70	120
32	1 1/4"	244	240	240	276	286	18	78	191	233	70	120
40	1 1/2"	235	248	248	282	295	13	73	208	251	80	140
50	2"	270	280	280	308	324	13	73	214	259	80	140
65	2 1/2"	365	362	362	394	410	8	78	248	298	100	140
80	3"	413	422	422	450	464	21	78	326	367	110	180
100	4"		518	518	544	560	7	88	348	405	110	180
125	5"		599	599	639	661	29	129	420	491	140	300
150	6"		689	689	729	737	5	105	437	508	150	400
200	8"		870	886	930	934	11	102	610	675	170	630
250	10"		1053	1087	1127	1113	100		739		220	630
300	12"		1234	1280		1312	107		829		280	630
350	14"		1417	1467		1503	107		906		350	630
400	16"		1602	1652		1674	112		1047		360	630


Table 5: Dimensions

l¹⁾ PN63 *) for valves with bonnet extension, h₂ = dismantling dimension, DIN/EN flange facings with DIN 2512 groove as standard

9 AVR D FL NIRO / AVR D FL DV NIRO

D: Straight-way, **FL:** Flanged ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

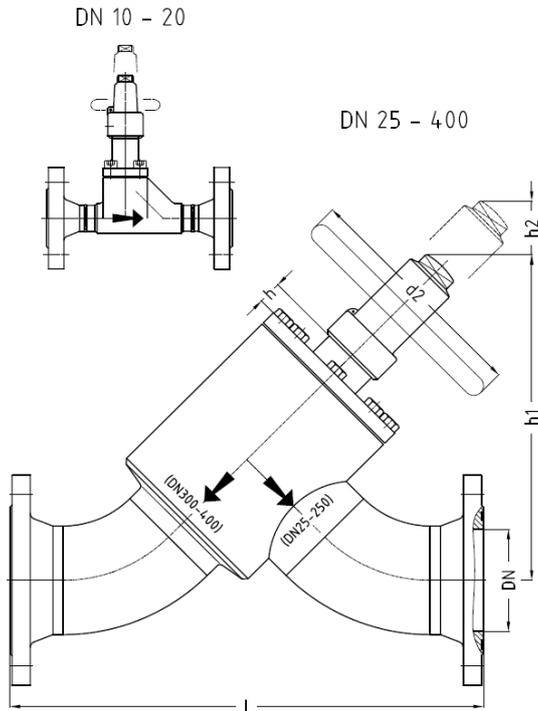

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 300...350 12" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400 16"	PN25	25	25	25	25	PS [bar]

Nominal size:		Flanged ends acc. to:					PN40/PN63, DN10-15:					
		AWP DN10-20 PN25 DN25-80 PN40	PN25 DIN 2634 EN1092-1	PN40 DIN 2635 EN1092-1	PN63 DIN 2636 EN1092-1	ANSI 300 RF	Dimensions h to d2 same as for DN20					
DN	INCH	l	l	l	l	l / l1)	h	h*)	h1	h1*)	h2	d2

Nominal size:		Flanged ends acc. to:					PN40/PN63, DN10-15:						
10	3/8"	149	156	182	202		22	54	128	160	35	60	
15	1/2"	149	162	188	202	192/218	22	54	128	160	35	60	
20	3/4"	175	192	192	208	228	31	68	148	185	45	60	
25	1"	230	222	222	258	266	18	78	188	231	70	120	
32	1 1/4"	244	240	240	276	286	18	78	191	233	70	120	
40	1 1/2"	235	248	248	282	295	13	73	208	251	80	140	
50	2"	270	280	280	308	324	13	73	214	259	80	140	
65	2 1/2"	365	362	362	394	410	8	78	248	298	100	140	
80	3"	413	422	422	450	464	21	78	326	367	110	180	
100	4"		518	518	544	560	7	88	348	405	110	180	
125	5"		599	599	639	661	29	129	420	491	140	300	
150	6"		689	689	729	737	5	105	437	508	150	400	
200	8"		870	886	930	934	11	102	610	675	170	630	
250	10"		1053	1087	1127	1113	100		739		220	630	
300	12"		1234	1280		1312	107		829		280	630	
350	14"		1417	1467		1503	107		906		350	630	
400	16"		1602	1652		1674	112		1047		360	630	

Table 6: Dimensions

I¹⁾ PN40/PN63 *) for valves with bonnet extension, h2 = dismantling dimension, DIN/EN flange facings with DIN 2512 groove as standard


10 AVR E FL / AVR E FL DV

E: Angle, **FL:** Flanged ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

DN 25 – 500

DN 10 – 20

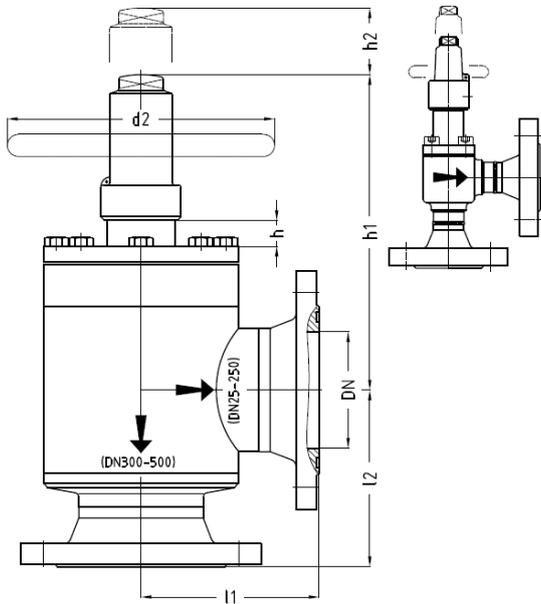

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 300...350 12" ...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400 16"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:	Flanged ends acc. to:	PN63, DN10-15:					
AWP DN10-20 PN25 DN25-80 PN40	PN25 DIN2634 EN1092-1 PN40 DIN 2635 EN1092-1 PN63 DIN 2636 EN1092-1	ANSI 300 RF	Dimensions h to d2 same as for DN20				

Nominal size:		Flanged ends acc. to:								PN63, DN10-15:							
DN	INCH	I1	I2	I1	I2	I1	I2	I1	I2	I1/ I11)	I2/ I21)	h	h*)	h1	h1*)	h2	d2
10	3/8"	67.5	67.5	71	71	71	71	87	87			22	54	110	143	35	60
15	1/2"	67.5	67.5	74	74	74	74	87	87	89/95	89/95	22	54	110	143	35	60
20	3/4"	73.5	73.5	82	82	82	82	90	90	100	100	31	68	125	162	45	60
25	1"	105	105	101	101	101	101	119	119	123	123	18	78	180	240	90	120
32	1 1/4"	105	105	103	103	103	103	121	121	126	126	18	78	180	240	90	120
40	1 1/2"	110	110	116	116	116	116	133	133	139	139	13	73	205	265	110	140
50	2"	114	114	119	119	119	119	133	133	141	141	13	73	205	265	110	140
65	2 1/2"	140	140	138	138	138	138	154	154	162	162	8	78	212	282	130	140
80	3"	155	155	159	159	159	159	173	173	180	180	21	78	291	350	150	180
100	4"			186	186	186	186	199	199	207	207	7	88	287	368	150	180
125	5"			204	204	204	204	224	224	235	235	29	129	360	456	190	300
150	6"			226	226	226	226	246	246	250	250	5	105	352	452	210	400
200	8"			276	276	284	284	306	306	308	308	11	102	513	608	240	630
250	10"			325	325	342	342	362	362	355	355	100		626		300	630
300	12"			376	376	399	399			415	415	107		673		385	630
350	14"			426	426	451	451			469	469	107		708		485	630
400	16"			476	476	501	501			512	512	112		832		500	630
450	18"			576	576	601	601			625	625	132		960		700	630
500	20"			591	591	606	606			628	628	132		960		700	630


Table 7: Dimensions

I1¹⁾, I2¹⁾ PN63 *) for valves with bonnet extension, h2 = dismantling dimension DIN/EN flange facings with DIN 2512 groove as standard

11 AVR E FL NIRO / AVR E FL DV NIRO

E: Angle, **FL:** Flanged ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

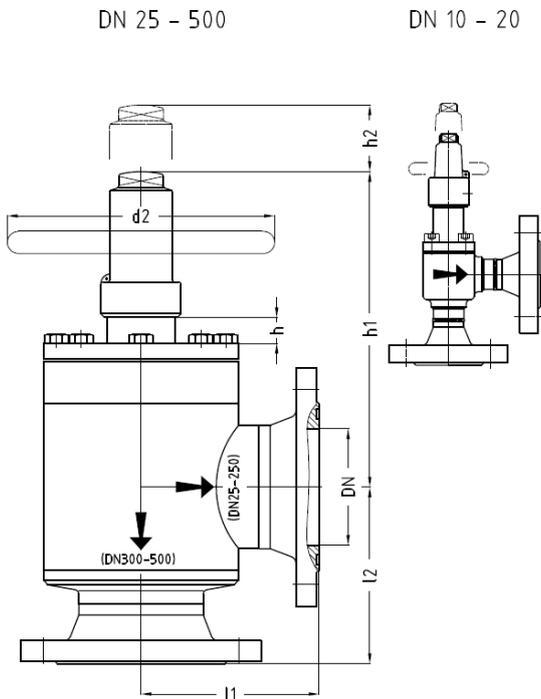

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 6...20 1/8" ...3/4"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 25...250 1" ...10"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 300...350 12" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400...500 16" ...20"	PN25	25	25	25	25	PS [bar]

Nominal size:	Flanged ends acc. to:	PN40/PN63, DN10-15:				
AWP DN10-20 PN25 DN25-80 PN40	PN25 DIN2634 EN1092-1 PN40 DIN 2635 EN1092-1 PN63 DIN 2636 EN1092-1	ANSI 300 RF	Dimensions h to d2 same as for DN20			

Nominal size:		Flanged ends acc. to:										PN40/PN63, DN10-15:					
DN	INCH	I1	I2	I1	I2	I1	I2	I1	I2	I1/ I11)	I2/ I21)	h	h*)	h1	h1*)	h2	d2
10	3/8"	67.5	67.5	71	71	77	77	87	87			22	54	110	143	35	60
15	1/2"	67.5	67.5	74	74	80	80	87	87	89/95	89/95	22	54	110	143	35	60
20	3/4"	73.5	73.5	82	82	82	82	90	90	100	100	31	68	125	162	45	60
25	1"	105	105	101	101	101	101	119	119	123	123	18	78	180	240	90	120
32	1 1/4"	105	105	103	103	103	103	121	121	126	126	18	78	180	240	90	120
40	1 1/2"	110	110	116	116	116	116	133	133	139	139	13	73	205	265	110	140
50	2"	114	114	119	119	119	119	133	133	141	141	13	73	205	265	110	140
65	2 1/2"	140	140	138	138	138	138	154	154	162	162	8	78	212	282	130	140
80	3"	155	155	159	159	159	159	173	173	180	180	21	78	291	350	150	180
100	4"			186	186	186	186	199	199	207	207	7	88	287	368	150	180
125	5"			204	204	204	204	224	224	235	235	29	129	360	456	190	300
150	6"			226	226	226	226	246	246	250	250	5	105	352	452	210	400
200	8"			276	276	284	284	306	306	308	308	11	102	513	608	240	630
250	10"			325	325	342	342	362	362	355	355	100		626		300	630
300	12"			376	376	399	399			415	415	107		673		385	630
350	14"			426	426	451	451			469	469	107		708		485	630
400	16"			476	476	501	501			512	512	112		832		500	630
450	18"			576	576	601	601			625	625	132		960		700	630
500	20"			591	591	606	606			628	628	132		960		700	630


Table 8: Dimensions

I1¹⁾, I2¹⁾ PN40/PN63 *) for valves with bonnet extension, h2 = dismantling dimension DIN/EN flange facings with DIN 2512 groove as standard

12 AVR D LE / AVR D LE DV

D: Straight-way, **LE:** Soldering ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

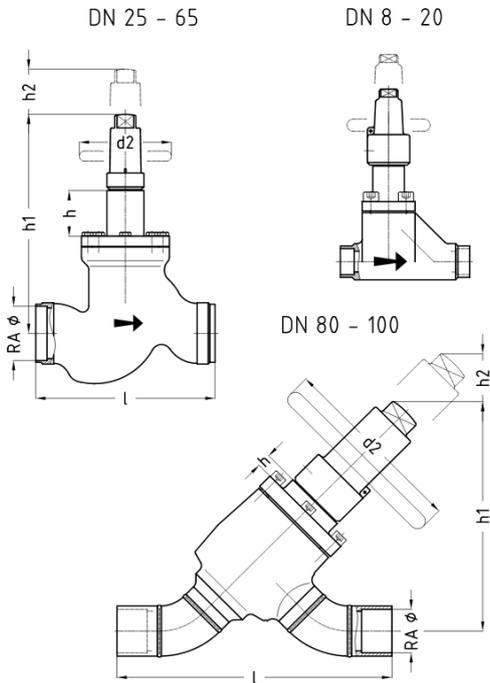

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 8...20	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 25...100	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	43/63*	PS [bar]

* only from DN80

Nominal size: Soldering ends acc. to:		PN63, DN8-15:								
		Dimensions l to d2 same as for DN20								
DN	RAØ	l	h	h*)	h1	h1*)	h2	d2		
8	10	84	22	54	128	160	35	60		
10	12	84	22	54	128	160	35	60		
15	15	84	22	54	128	160	35	60		
15	18	84	22	54	128	160	35	60		
20	22	110	31	68	148	185	45	60		
25	28	160	18	78	201	261	90	120		
32	35	180	18	78	202	262	90	120		

Nominal size:	Soldering ends acc. to:	PN63, DN8-15:						
40	42	200	13	73	234	294	110	140
50	54	230	13	73	234	294	110	140
65	64	290	8	78	262	332	130	140
65	76	290	8	78	262	332	130	140
80	89	406	21	78	326	367	110	180
100	108	518	7	88	348	405	110	180


Table 9: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

13 AVR D LE NIRO / AVR D LE DV NIRO

D: Straight-way, **LE:** Soldering ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

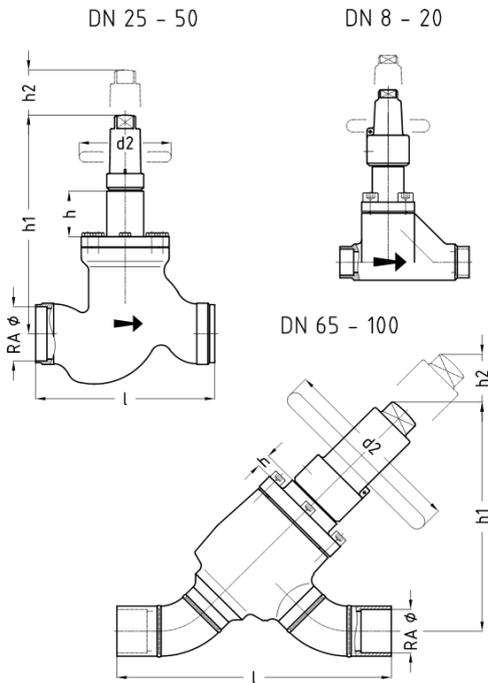

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 8...20	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 25...100	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	50.2/63*	PS [bar]

* only from DN65

Nominal size: Soldering ends acc. to:		PN40/63, DN8-15:								
		Dimensions l to d2 same as for DN20								
DN	RAØ	l	h	h*)	h1	h1*)	h2	d2		
8	10	84	22	54	128	160	35	60		
10	12	84	22	54	128	160	35	60		
15	15	84	22	54	128	160	35	60		
15	18	84	22	54	128	160	35	60		
20	22	110	31	68	148	185	45	60		
25	28	160	18	78	201	261	90	120		
32	35	180	18	78	202	262	90	120		

Nominal size:	Soldering ends acc. to:	PN40/63, DN8-15:						
40	42	200	13	73	234	294	110	140
50	54	230	13	73	234	294	110	140
65	64	366	8	78	248	298	100	140
65	76	366	8	78	248	298	100	140
80	89	406	21	78	326	367	110	180
100	108	518	7	88	348	405	110	180


Table 10: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

14 AVR E LE / AVR E LE DV

E: Angle, **LE:** Soldering ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

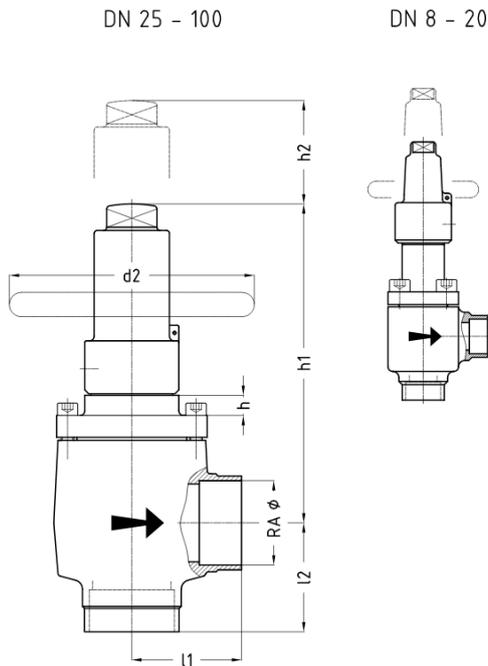

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 8...20	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 25...100	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]

Nominal size: Soldering ends acc. to:		PN63, DN8-15:								
DN	RAØ	Dimensions l1 to d2 same as for DN20								
		l1	l2	h	h*)	h1	h1*)	h2	d2	
8	10	35	35	22	54	110	143	35	60	
10	12	35	35	22	54	110	143	35	60	
15	15	35	35	22	54	110	143	35	60	
15	18	35	35	22	54	110	143	35	60	
20	22	41	41	31	68	125	162	45	60	
25	28	60	60	18	78	180	240	90	120	
32	35	60	60	18	78	180	240	90	120	
40	42	70	70	13	73	205	265	110	140	

Nominal size: Soldering ends acc. to:		PN63, DN8-15:							
50	54	70	70	13	73	205	265	110	140
65	64	140	140	8	78	212	282	130	140
65	76	140	140	8	78	212	282	130	140
80	89	151	151	21	78	291	350	150	180
100	108	186	186	7	88	287	368	150	180


Table 11: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

15 AVR E LE NIRO / AVR E LE DV NIRO

E: Angle, **LE:** Soldering ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

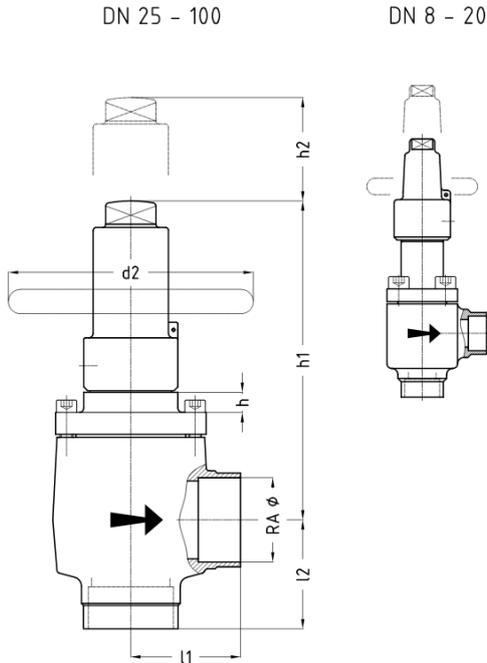

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 8...20	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 25...100	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]

Nominal size: Soldering ends acc. to:		PN40/63, DN8-15:								
DN	RAØ	Dimensions l1 to d2 same as for DN20								
		l1	l2	h	h*)	h1	h1*)	h2	d2	
8	10	35	35	22	54	110	143	35	60	
10	12	35	35	22	54	110	143	35	60	
15	15	35	35	22	54	110	143	35	60	
15	18	35	35	22	54	110	143	35	60	
20	22	41	41	31	68	125	162	45	60	
25	28	60	60	18	78	180	240	90	120	
32	35	60	60	18	78	180	240	90	120	
40	42	70	70	13	73	205	265	110	140	

Nominal size: Soldering ends acc. to:		PN40/63, DN8-15:							
50	54	70	70	13	73	205	265	110	140
65	64	140	140	8	78	212	282	130	140
65	76	140	140	8	78	212	282	130	140
80	89	151	151	21	78	291	350	150	180
100	108	186	186	7	88	287	368	150	180


Table 12: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

16 AVR D SE / AVR D SE DV

D: Straight-way, **SE:** Screwed ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

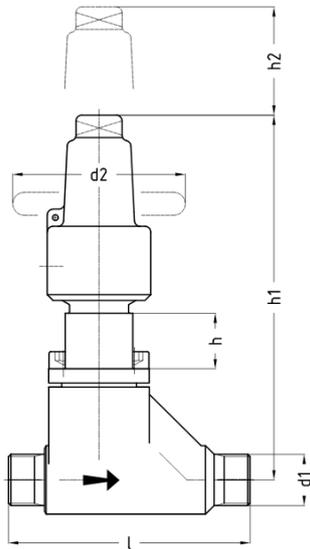

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

NOTICE! Installation lengths (l) may vary due to the different threads. Body DN20 for threads G3/4", M26x1.5 RA18 and larger!

DN	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 8...20	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]

Nominal size: Screwed ends acc. to:		PN63, DN8:						
		Dimensions l to d2 same as for DN20						
DN	d1	l	h	h*)	h1	h1*)	h2	d2
8	See coding, connections	84	22	54	128	160	35	60
20		110	31	68	148	185	45	60


Table 13: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

17 AVR D SE NIRO / AVR D SE DV NIRO

D: Straight-way, **SE:** Screwed ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

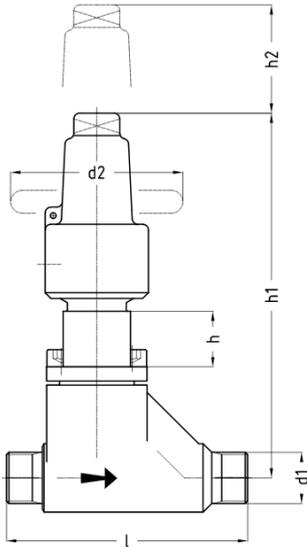

NOTICE! Installation lengths (l) may vary due to the different threads. Body DN20 for threads G3/4", M26x1.5 RA18 and larger!

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 8...20	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]

Nominal size: Screwed ends acc. to:		PN40/63, DN8:						
		Dimensions l to d2 same as for DN20						
DN	d1	l	h	h*)	h1	h1*)	h2	d2
8	See coding, connections	84	22	54	128	160	35	60
20		110	31	68	148	185	45	60


Table 14: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

18 AVR E SE / AVR E SE DV

I: Angle, **SE:** Screwed ends, **DV:** Bonnet extension

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

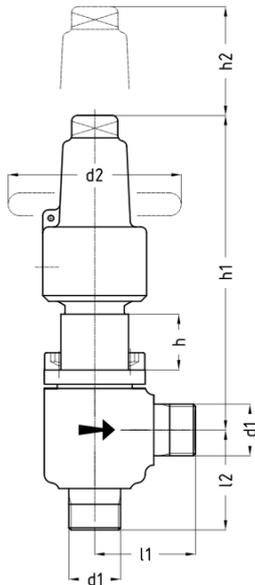

NOTICE! Installation lengths (l) may vary due to the different threads. Body DN20 for threads G3/4", M26x1.5 RA18 and larger!

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 8...20	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]

Nominal size: Screwed ends acc. to:		PN63, DN8:							
		Dimensions l1 to d2 same as for DN20							
DN	d1	l1	l2	h	h*)	h1	h1*)	h2	d2
8	See coding, connections	35	35	22	54	110	143	35	60
20		41	41	31	68	125	162	45	60


Table 15: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

19 AVR E SE NIRO / AVR E SE DV NIRO

I: Angle, **SE:** Screwed ends, **DV:** Bonnet extension

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

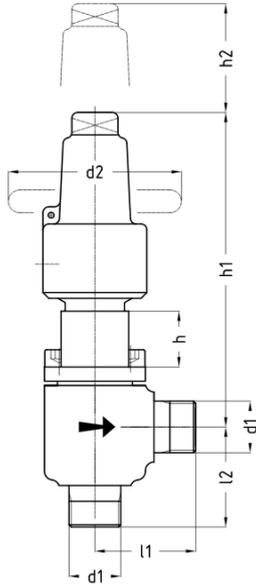

NOTICE! Installation lengths (l) may vary due to the different threads. Body DN20 for threads G3/4", M26x1.5 RA18 and larger!

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 8...20	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]

Nominal size: Screwed ends acc. to:		PN40/63, DN8:							
		Dimensions l1 to d2 same as for DN20							
DN	d1	l1	l2	h	h*)	h1	h1*)	h2	d2
8	See coding, connections	35	35	22	54	110	143	35	60
20		41	41	31	68	125	162	45	60


Table 16: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

20 AVR D AE

D: Straight-way, **AE:** Welding ends

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

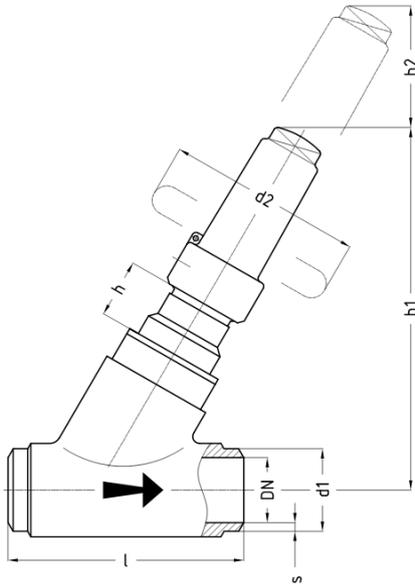

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...32 3/8" ...1 1/4"	PN160	120	160	160	99	PS [bar]

Nominal size:		Welding ends acc. to:							
		ISO Series 1							
DN	INCH	d1	s	l	h	h1	h2	d2	
10	3/8"	17.2	2.3	120	30	186	70	120	
15	1/2"	21.3	2.6	120	30	186	70	120	
20	3/4"	26.9	3.2	120	30	186	70	120	
25	1"	33.7	3.6	120	30	186	70	120	
32	1 1/4"	42.4	4.5	120	30	186	70	120	


Table 17: Dimensions

h2 = dismantling dimension

21 AVR D AE NIRO

D: Straight-way, **AE:** Welding ends

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

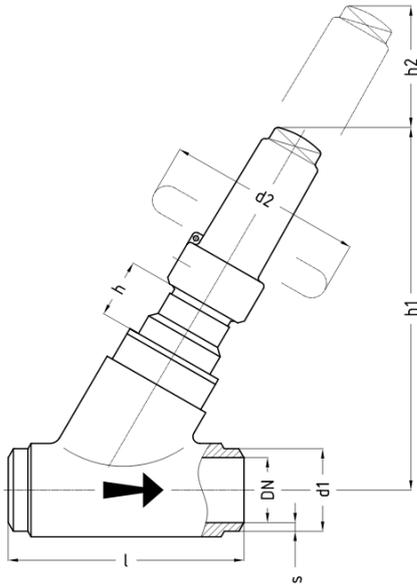

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...32 3/8"...1 1/4"	PN160	160	160	160	106	PS [bar]

Nominal size:		Welding ends acc. to:						
		ISO Series 1						
DN	INCH	d1	s	l	h	h1	h2	d2
10	3/8"	17.2	2.3	120	30	186	70	120
15	1/2"	21.3	2.6	120	30	186	70	120
20	3/4"	26.9	3.2	120	30	186	70	120
25	1"	33.7	3.6	120	30	186	70	120
32	1 1/4"	42.4	4.5	120	30	186	70	120


Table 18: Dimensions

h2 = dismantling dimension

22 AVR E AE

E: Angle, **AE:** Welding ends

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

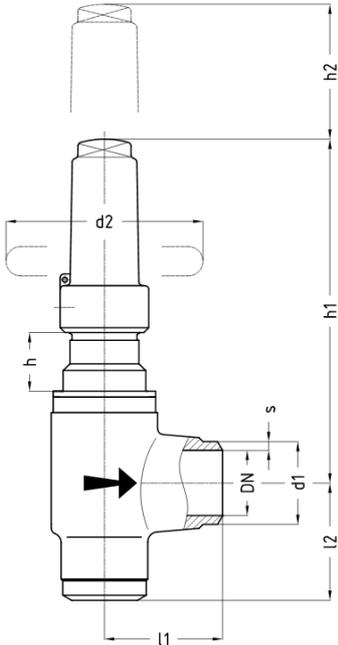

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...32 3/8" ...1 1/4"	PN160	120	160	160	99	PS [bar]

Nominal size:		Welding ends acc. to:							
		ISO Series 1							
DN	INCH	d1	s	l1	l2	h	h1	h2	d2
10	3/8"	17.2	2.3	60	60	30	176	80	120
15	1/2"	21.3	2.6	60	60	30	176	80	120
20	3/4"	26.9	3.2	60	60	30	176	80	120
25	1"	33.7	3.6	60	60	30	176	80	120
32	1 1/4"	42.4	4.5	60	60	30	176	80	120


Table 19: Dimensions

h2 = dismantling dimension

23 AVR E AE NIRO

E: Angle, **AE:** Welding ends

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

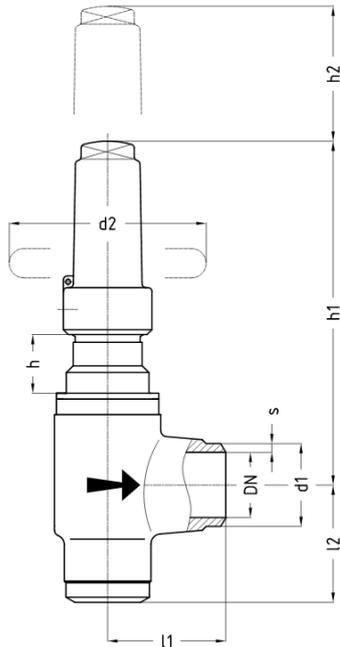

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...32 3/8"...1 1/4"	PN160	160	160	160	106	PS [bar]

Nominal size:		Welding ends acc. to:							
		ISO Series 1							
DN	INCH	d1	s	l1	l2	h	h1	h2	d2
10	3/8"	17.2	2.3	60	60	30	176	80	120
15	1/2"	21.3	2.6	60	60	30	176	80	120
20	3/4"	26.9	3.2	60	60	30	176	80	120
25	1"	33.7	3.6	60	60	30	176	80	120
32	1 1/4"	42.4	4.5	60	60	30	176	80	120


Table 20: Dimensions

h2 = dismantling dimension

24 AVR D LE

D: Straight-way, **LE:** Soldering ends

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

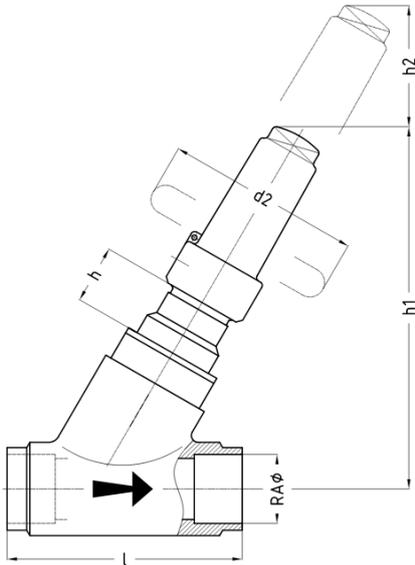

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 10...32	PN160	120	160	160	99	PS [bar]

Nominal size:		Soldering ends acc. to:				
DN	RAØ	l	h	h1	h2	d2
10	12	120	30	186	70	120
15	15	120	30	186	70	120
15	18	120	30	186	70	120
15	LE 3/4"	120	30	186	70	120
20	22	120	30	186	70	120
20	LE 7/8"	120	30	186	70	120
25	28	120	30	186	70	120
32	35	120	30	186	70	120


Table 21: Dimensions

h2 = dismantling dimension

25 AVR D LE NIRO

D: Straight-way, **LE:** Soldering ends

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

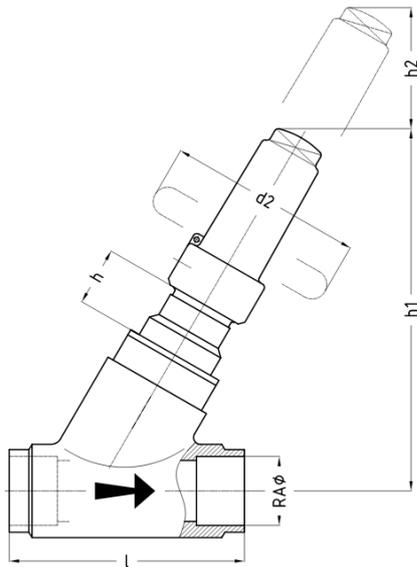

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 10...32	PN160	160	160	160	106	PS [bar]

Nominal size:	Soldering ends acc. to:					
DN	RAØ	l	h	h1	h2	d2
10	12	120	30	186	70	120
15	15	120	30	186	70	120
15	18	120	30	186	70	120
15	LE 3/4"	120	30	186	70	120
20	22	120	30	186	70	120
20	LE 7/8"	120	30	186	70	120
25	28	120	30	186	70	120
32	35	120	30	186	70	120


Table 22: Dimensions

h2 = dismantling dimension

26 AVR E LE

E: Angle, **LE:** Soldering ends

AVR steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

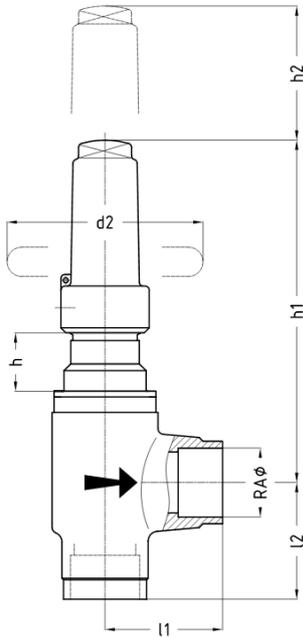

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 10...32	PN160	120	160	160	99	PS [bar]

Nominal size:		Soldering ends acc. to:					
DN	RAØ	l1	l2	h	h1	h2	d2
10	12	60	60	30	176	80	120
15	15	60	60	30	176	80	120
15	18	60	60	30	176	80	120
15	LE 3/4"	60	60	30	176	80	120
20	22	60	60	30	176	80	120
20	LE 7/8"	60	60	30	176	80	120
25	28	60	60	30	176	80	120
32	35	60	60	30	176	80	120


Table 23: Dimensions

h2 = dismantling dimension

27 AVR E LE NIRO

E: Angle, **LE:** Soldering ends

AVR stainless steel shut-off valve - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

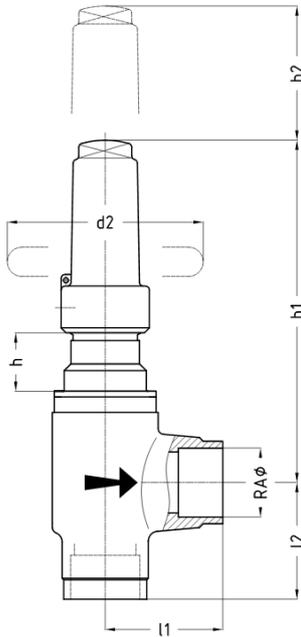

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 10...32	PN160	160	160	160	106	PS [bar]

Nominal size:		Soldering ends acc. to:					
DN	RAØ	l1	l2	h	h1	h2	d2
10	12	60	60	30	176	80	120
15	15	60	60	30	176	80	120
15	18	60	60	30	176	80	120
15	LE 3/4"	60	60	30	176	80	120
20	22	60	60	30	176	80	120
20	LE 7/8"	60	60	30	176	80	120
25	28	60	60	30	176	80	120
32	35	60	60	30	176	80	120


Table 24: Dimensions

h2 = dismantling dimension

28 AVR MAV D AE DV

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV steel shut-off valve with J+J electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

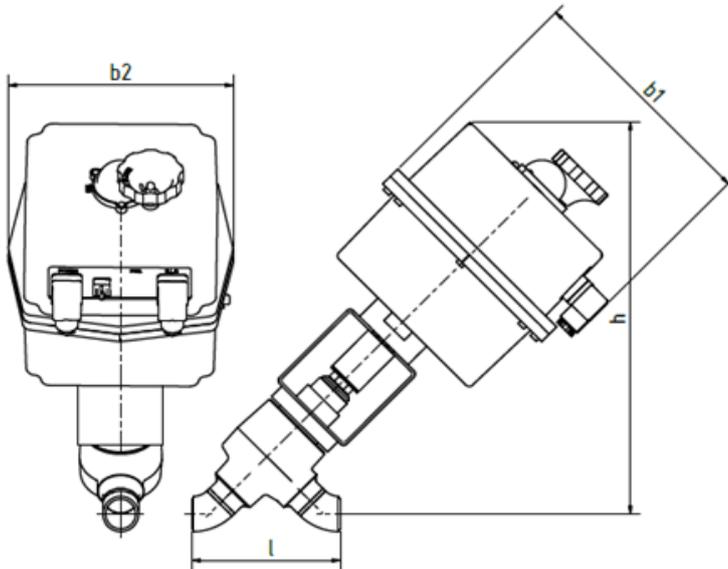

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 6...65 1/8" ...2 1/2"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]

Nominal size:					PN63, DN6-15: Dimensions same as for DN20 /									
		ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension					
DN	INCH	d1	s1)	s2)	d1	s	d1	s	l	h	h*)	b1	b2	
6	1/8"	10.2	1.6	1.6	10.3	1.7	10.3	2.4	84	TBD	TBD	TBD	TBD	
8	1/4"	13.5	1.8	1.8	13.7	2.2	13.7	3.0	84	TBD	TBD	TBD	TBD	
10	3/8"	17.2	1.8	1.8	17.1	2.3	17.1	3.2	84	TBD	TBD	TBD	TBD	
15	1/2"	21.3	2.0	2.0	21.3	2.8	21.3	3.7	84	TBD	TBD	TBD	TBD	
20	3/4"	26.9	2.3	2.6	26.7	2.9	26.7	3.9	110	TBD	TBD	TBD	TBD	
25	1"	33.7	2.6	2.6	33.4	3.4	33.4	4.5	140	374	385	231	213	
32	1 1/4"	42.4	2.6	2.9	42.2	3.6	42.2	4.8	154	374	385	231	213	
40	1 1/2"	48.3	2.6	2.9	48.3	3.7	48.3	5.1	156	TBD	TBD	TBD	TBD	
50	2"	60.3	2.9	2.9	60.3	3.9			182	TBD	TBD	TBD	TBD	
65	2 1/2"	76.1	2.9	3.2	73.0	5.2			256	TBD	TBD	TBD	TBD	


Table 25: Dimensions

1) PN25 / PN40, 2) PN63 PN63 *) for valve with bonnet extension

29 AVR MAV D AE DV NIRO

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV stainless steel shut-off valve with J+J electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

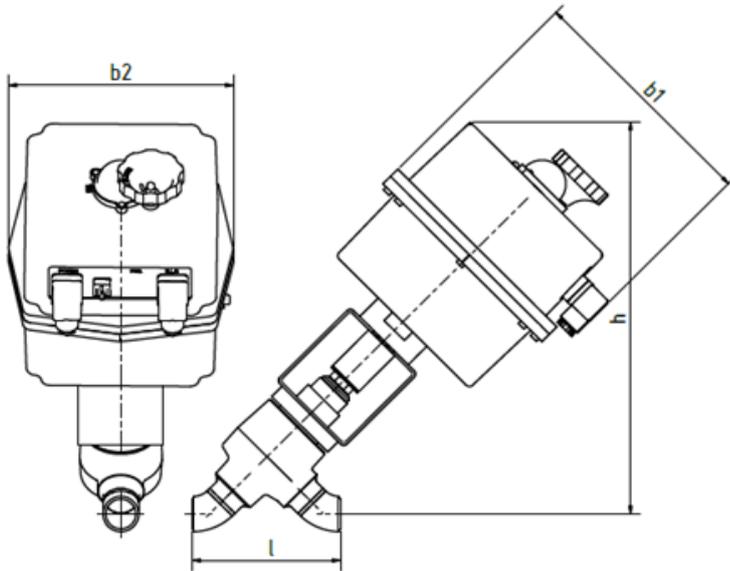

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 25...65 1" ...2 1/2"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]

Nominal size:					PN40/PN63, DN6-15: Dimensions same as for DN20 /								
		ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension				
DN	INCH	d1	s1)	s2)	d1	s	d1	s	l	h	h*)	b1	b2
6	1/8"	10.2	1.6	1.6	10.3	1.7	10.3	2.4	84	TBD	TBD	TBD	TBD
8	1/4"	13.5	1.8	1.8	13.7	2.2	13.7	3.0	84	TBD	TBD	TBD	TBD
10	3/8"	17.2	1.8	1.8	17.1	2.3	17.1	3.2	84	TBD	TBD	TBD	TBD
15	1/2"	21.3	2.0	2.0	21.3	2.8	21.3	3.7	84	TBD	TBD	TBD	TBD
20	3/4"	26.9	2.3	2.6	26.7	2.9	26.7	3.9	110	TBD	TBD	TBD	TBD
25	1"	33.7	2.6	2.6	33.4	3.4	33.4	4.5	140	374	385	231	213
32	1 1/4"	42.4	2.6	2.9	42.2	3.6	42.2	4.8	154	374	385	231	213
40	1 1/2"	48.3	2.6	2.9	48.3	3.7	48.3	5.1	156	TBD	TBD	TBD	TBD
50	2"	60.3	2.9	2.9	60.3	3.9			182	TBD	TBD	TBD	TBD
65	2 1/2"	76.1	2.9	3.2	73.0	5.2			256	TBD	TBD	TBD	TBD


Table 26: Dimensions

1) PN25 / PN40, 2) PN63 PN63 *) for valve with bonnet extension

30 AVR MAV D AE DV

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV steel shut-off valve with J+J electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

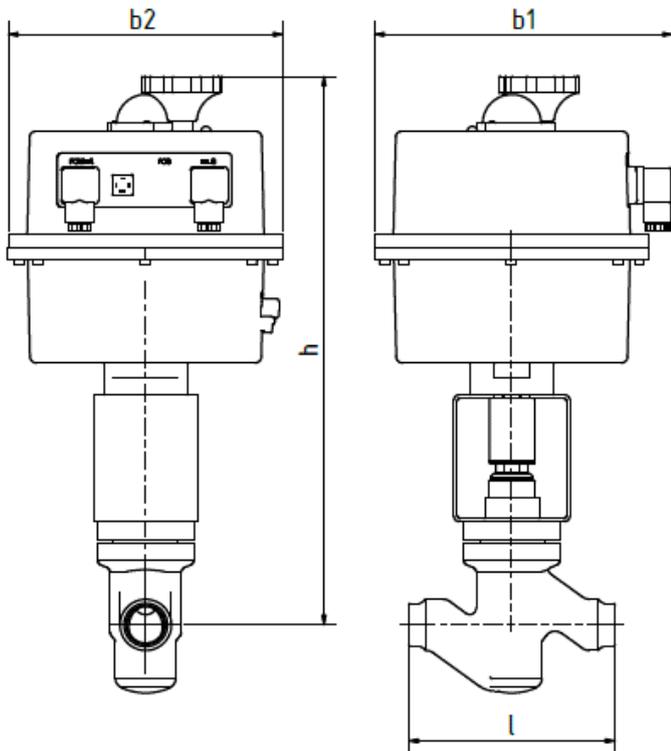

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 25...65 1/...2 1/2"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]

Nominal size:													
		ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension				
DN	INCH	d1	s1)	s2)	d1	s	d1	s	l	h	h*)	b1	b2
25	1"	33.7	2.6	2.6	33.4	3.4	33.4	4.5	160	428	444	231	213
32	1 1/4"	42.4	2.6	2.9	42.2	3.6	42.2	4.8	180	428	444	231	213
40	1 1/2"	48.3	2.6	2.9	48.3	3.7	48.3	5.1	200	TBD	TBD	TBD	TBD
50	2"	60.3	2.9	2.9	60.3	3.9			230	TBD	TBD	TBD	TBD
65	2 1/2"	76.1	2.9	3.2	73.0	5.2			290	TBD	TBD	TBD	TBD


Table 27: Dimensions

1) PN25 / PN40, 2) PN63 PN63 *) for valve with bonnet extension

31 AVR MAV D AE DV NIRO

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV stainless steel shut-off valve with J+J electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

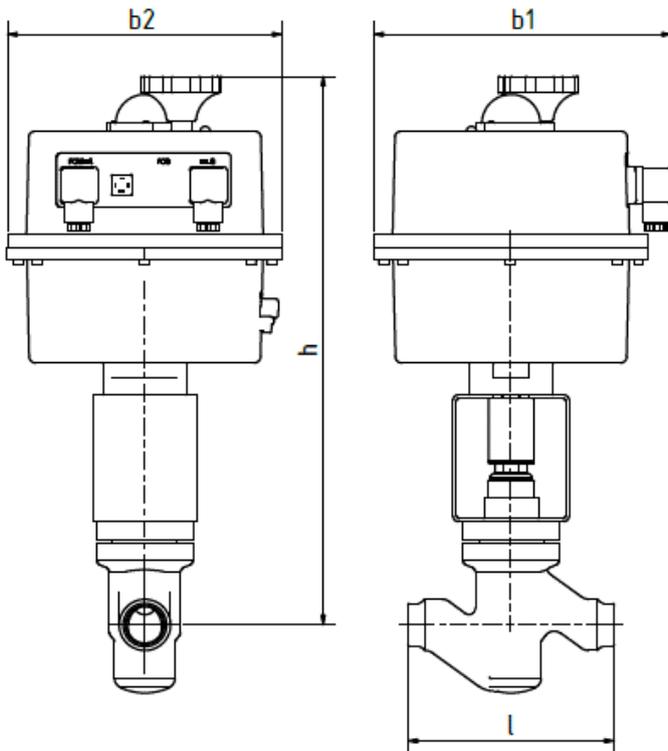

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 6...50 1/8"...2"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]

Nominal size:													
		ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension				
DN	INCH	d1	s1)	s2)	d1	s	d1	s	l	h	h*)	b1	b2
25	1"	33.7	2.6	2.6	33.4	3.4	33.4	4.5	160	428	444	231	213
32	1 1/4"	42.4	2.6	2.9	42.2	3.6	42.2	4.8	180	428	444	231	213
40	1 1/2"	48.3	2.6	2.9	48.3	3.7	48.3	5.1	200	TBD	TBD	TBD	TBD
50	2"	60.3	2.9	2.9	60.3	3.9			230	TBD	TBD	TBD	TBD


Table 28: Dimensions

1) PN25 / PN40, 2) PN63 PN63 *) for valve with bonnet extension

32 AVR MAV E AE DV

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV steel shut-off valve with J+J electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH3, CO2) and non-corrosive gases and liquids according to EN 378-1 as well as brines

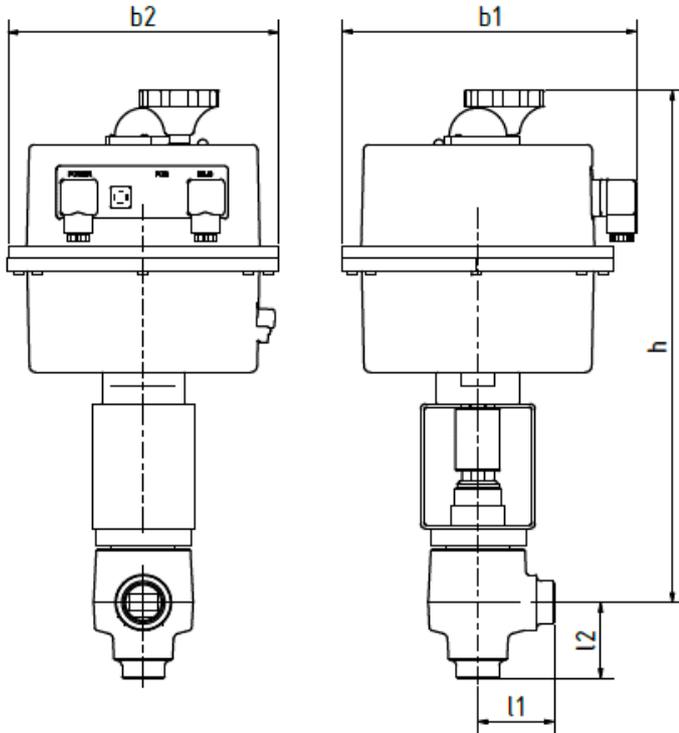

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 6...65 1/8" ...2 1/2"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]

Nominal size:		PN63, DN6-15: Dimensions same as for DN20												
DN	INCH	ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension					
		d1	s1)	s2)	d1	s	d1	s	l1	l2	h	h*)	b1	b2
6	1/8"	10.2	1.6	1.6	10.3	1.7	10.3	2.4	35	35	TBD	TBD	TBD	TBD
8	1/4"	13.5	1.8	1.8	13.7	2.2	13.7	3.0	35	35	TBD	TBD	TBD	TBD
10	3/8"	17.2	1.8	1.8	17.1	2.3	17.1	3.2	35	35	TBD	TBD	TBD	TBD
15	1/2"	21.3	2.0	2.0	21.3	2.8	21.3	3.7	35	35	TBD	TBD	TBD	TBD
20	3/4"	26.9	2.3	2.6	26.7	2.9	26.7	3.9	41	41	TBD	TBD	TBD	TBD
25	1"	33.7	2.6	2.6	33.4	3.4	33.4	4.5	60	60	406	422	231	213
32	1 1/4"	42.4	2.6	2.9	42.2	3.6	42.2	4.8	60	60	406	422	231	213
40	1 1/2"	48.3	2.6	2.9	48.3	3.7	48.3	5.1	70	70	TBD	TBD	TBD	TBD
50	2"	60.3	2.9	2.9	60.3	3.9			70	70	TBD	TBD	TBD	TBD

Nominal size:								PN63, DN6-15: Dimensions same as for DN20						
65	2 1/2"	76.1	2.9	3.2	73.0	5.2		85	85	TBD	TBD	TBD	TBD	


Table 29: Dimensions

1) PN25 / PN40, 2) PN63 PN63 *) for valve with bonnet extension

33 AVR MAV E AE DV NIRO

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV stainless steel shut-off valve with J+J electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

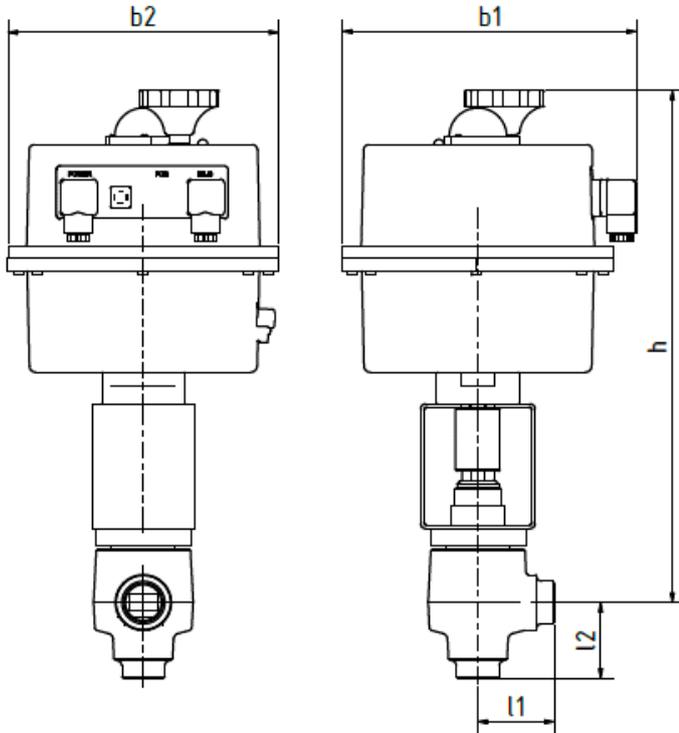

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 6...65 1/8" ...2 1/2"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]

Nominal size:		PN40/PN63, DN6-15: Dimensions same as for DN20 /												
DN	INCH	ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall di- mension					
		d1	s1)	s2)	d1	s	d1	s	l1	l2	h	h*)	b1	b2
6	1/8"	10.2	1.6	1.6	10.3	1.7	10.3	2.4	35	35	TBD	TBD	TBD	TBD
8	1/4"	13.5	1.8	1.8	13.7	2.2	13.7	3.0	35	35	TBD	TBD	TBD	TBD
10	3/8"	17.2	1.8	1.8	17.1	2.3	17.1	3.2	35	35	TBD	TBD	TBD	TBD
15	1/2"	21.3	2.0	2.0	21.3	2.8	21.3	3.7	35	35	TBD	TBD	TBD	TBD
20	3/4"	26.9	2.3	2.6	26.7	2.9	26.7	3.9	41	41	TBD	TBD	TBD	TBD
25	1"	33.7	2.6	2.6	33.4	3.4	33.4	4.5	60	60	406	422	231	213
32	1 1/4"	42.4	2.6	2.9	42.2	3.6	42.2	4.8	60	60	406	422	231	213
40	1 1/2"	48.3	2.6	2.9	48.3	3.7	48.3	5.1	70	70	TBD	TBD	TBD	TBD
50	2"	60.3	2.9	2.9	60.3	3.9			70	70	TBD	TBD	TBD	TBD

Nominal size:							PN40/PN63, DN6-15: Dimensions same as for DN20 /							
65	2 1/2"	76.1	2.9	3.2	73.0	5.2			85	85	TBD	TBD	TBD	TBD


Table 30: Dimensions

1) PN25 / PN40, 2) PN63 PN63 *) for valve with bonnet extension

34 AVR MAV D AE DV

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV steel shut-off valve with electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

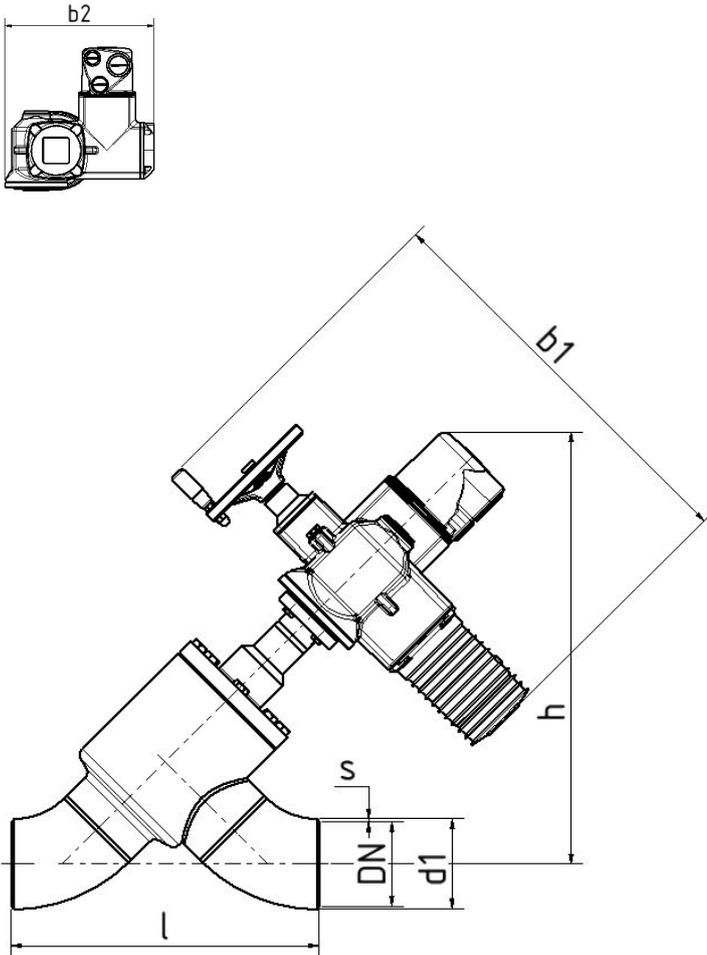

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 80...200 3"...8"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 250...350 10"...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400 16"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:								
		ISO Series 1	ANSI Sched 40	ANSI Sched 80	Overall dimension	PS25	PS40	PS63

Nominal size:																		
DN	INCH	d1	s1)	s2)	d1	s	d1	s	l	h	b1	b2	h	b1	b2	h	b1	b2
80	3"	88.9	3.2	3.6	88.9	5.5			304	510	514	300	510	514	300	510	537	313
100	4"	114.3	3.6	4.0	114.3	6.0			386	547	514	300	549	537	313	567	725	376
125	5"	139.7	4.0	4.5	141.3	6.6			461	632	537	313	651	725	376	651	728	376
150	6"	168.3	4.5	5.6	168.3	7.1			537	701	725	376	701	728	376			
200	8"	219.1	6.3	7.1	219.1	8.2			707	764	728	376	909	795	500			
250	10"	273.0	7.1		273.0	9.3			874	1000	795	500	1000	795	500			
300	12"	323.9	8.0		323.8	10.3			1048	1088	795	500						
350	14"	355.6	8.0		355.6	11.1			1214	1253	919	594						
400	16"	406.4	8.8		406.4	12.7			1380	1348	919	594						


Table 31: Dimensions

1) PN25 / PN40 2) PN63

35 AVR MAV D AE DV NIRO

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV stainless steel shut-off valve with electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

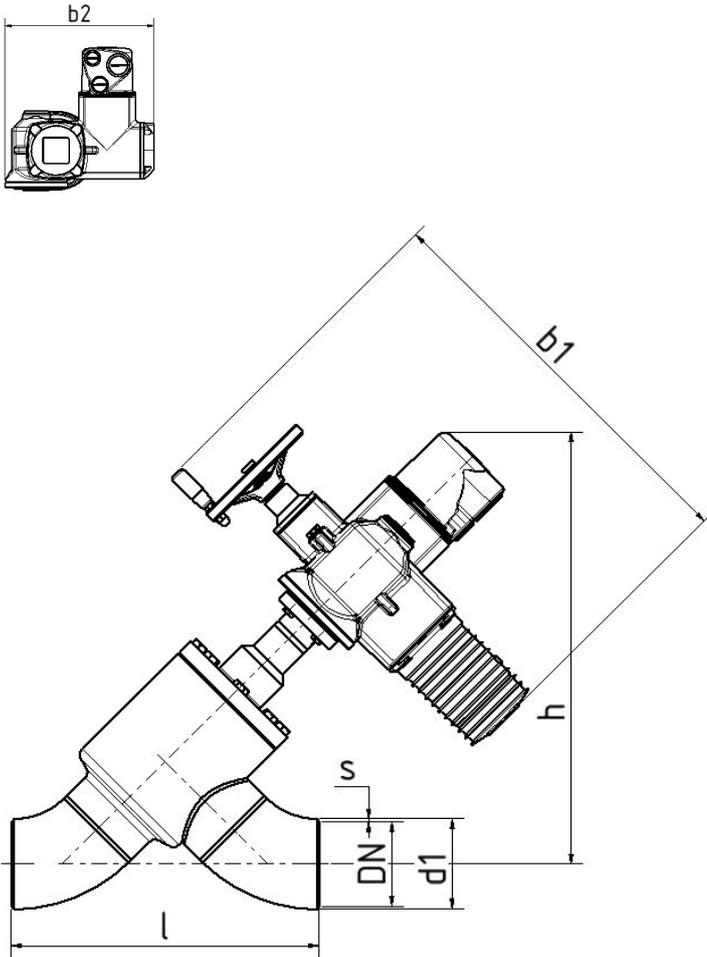

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 80...200 3"...8"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 250...350 10"...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400 16"	PN25	25	25	25	25	PS [bar]

Nominal size:								
		ISO Series 1	ANSI Sched 40	ANSI Sched 80	Overall dimension	PS25	PS40	PS63

Nominal size:																		
DN	INCH	d1	s1)	s2)	d1	s	d1	s	l	h	b1	b2	h	b1	b2	h	b1	b2
80	3"	88.9	3.2	3.6	88.9	5.5			304	510	514	300	510	514	300	510	537	313
100	4"	114.3	3.6	4.0	114.3	6.0			386	547	514	300	549	537	313	567	725	376
125	5"	139.7	4.0	4.5	141.3	6.6			461	632	537	313	651	725	376	651	728	376
150	6"	168.3	4.5	5.6	168.3	7.1			537	701	725	376	701	728	376			
200	8"	219.1	6.3	7.1	219.1	8.2			707	764	728	376	909	795	500			
250	10"	273.0	7.1		273.0	9.3			874	1000	795	500	1000	795	500			
300	12"	323.9	8.0		323.8	10.3			1048	1088	795	500						
350	14"	355.6	8.0		355.6	11.1			1214	1253	919	594						
400	16"	406.4	8.8		406.4	12.7			1380	1348	919	594						


Table 32: Dimensions

1) PN25 / PN40 2) PN63

36 AVR MAV E AE DV

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV steel shut-off valve with electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

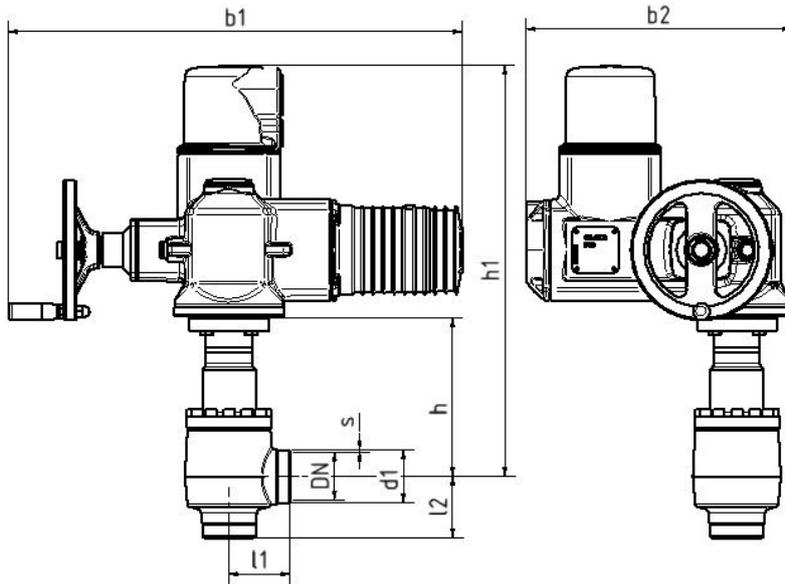

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 80...200 3"...8"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
	PN63	15.75	31.5	47.2	63	63	63	PS [bar]
DN 250...350 10"...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400...500 16"...20"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:																					
		ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension			PS25			PS40			PS63			
DN	INC H	d1	s1)	s2)	d1	s	d1	s	l1	l2	h	h1	b1	b2	h1	b1	b2	h1	b1	b2	
80	3"	88.9	3.2	3.6	88.9	5.5			100	100	243	531	514	303	531	514	303	533	537	313	
100	4"	114.3	3.6	4.0	114.3	6.0			120	120	260	548	514	303	550	537	313	576	725	376	
125	5"	139.7	4.0	4.5	141.3	6.6			135	135	349	639	537	313	665	725	376	665	728	376	


Nominal size:																				
150	6"	168.3	4.5	5.6	168.3	7.1			150	150	338	704	725	376	704	728	376			
200	8"	219.1	6.3	7.1	219.1	8.2			195	195	402	718	728	376	762	795	500			
250	10"	273.0	7.1		273.0	9.3			236	236	421	781	795	500	781	795	500			
300	12"	323.9	8.0		323.8	10.3			283	283	468	828	798	500						
350	14"	355.6	8.0		355.6	11.1			325	325	503	853	919	594						
400	16"	406.4	8.8		406.4	12.7			365	365	567	917	919	594						
500	20"	508.0	10.0		508.0	15.1			465	465	700	1125	1177	645						

Table 33: Dimensions
 1) PN25 / PN40, 2) PN63

37 AVR MAV E AE DV NIRO

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVR MAV stainless steel shut-off valve with electric actuator - stem seal with spring-energised PTFE ring for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

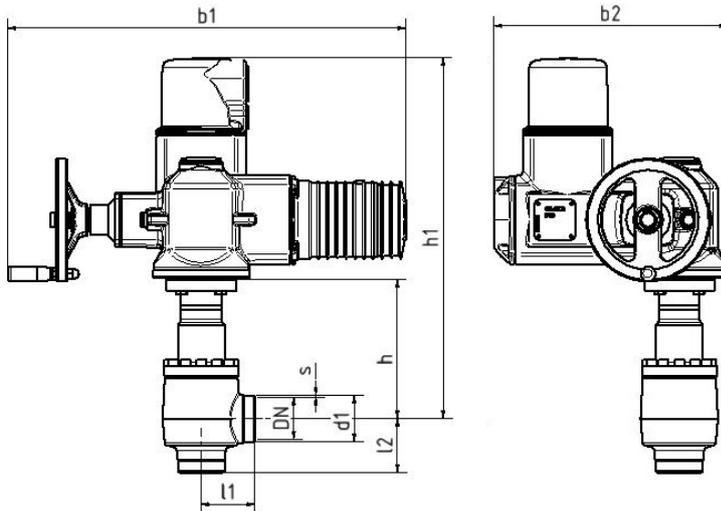

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 80...200 3" ...8"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
	PN63	63	63	63	63	PS [bar]
DN 250...350 10" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400...500 16" ...20"	PN25	25	25	25	25	PS [bar]

Nominal size:																					
		ISO Series 1			ANSI Sched 40		ANSI Sched 80		Overall dimension			PS25			PS40			PS63			
DN	INC H	d1	s1)	s2)	d1	s	d1	s	l1	l2	h	h1	b1	b2	h1	b1	b2	h1	b1	b2	
80	3"	88.9	3.2	3.6	88.9	5.5			100	100	243	531	514	303	531	514	303	533	537	313	
100	4"	114.3	3.6	4.0	114.3	6.0			120	120	260	548	514	303	550	537	313	576	725	376	
125	5"	139.7	4.0	4.5	141.3	6.6			135	135	349	639	537	313	665	725	376	665	728	376	
150	6"	168.3	4.5	5.6	168.3	7.1			150	150	338	704	725	376	704	728	376				

Nominal size:																			
200	8"	219.1	6.3	7.1	219.1	8.2			195	195	402	718	728	376	762	795	500		
250	10"	273.0	7.1		273.0	9.3			236	236	421	781	795	500	781	795	500		
300	12"	323.9	8.0		323.8	10.3			283	283	468	828	798	500					
350	14"	355.6	8.0		355.6	11.1			325	325	503	853	919	594					
400	16"	406.4	8.8		406.4	12.7			365	365	567	917	919	594					
500	20"	508.0	10.0		508.0	15.1			465	465	700	1125	1177	645					


Table 34: Dimensions

1) PN25 / PN40, 2) PN63

38 AVB materials

Designation and materials

AVB - shut-off valve with metal bellows

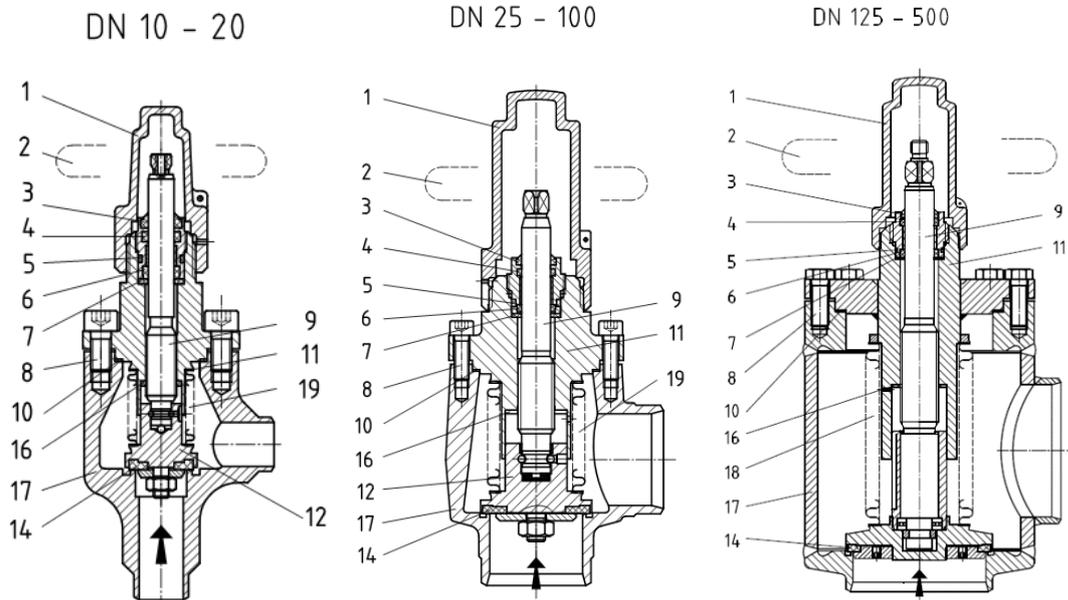

Part	Material for steel valves	Material for stainless steel valves
1 Cap	Aluminium AlSi10Mg	Aluminium AlSi10Mg
2 Handwheel	Steel	Steel
3 Wiper ring	NBR	NBR
4 O-ring A	CR, NBR, HNBR, EPDM, FPM*	CR, NBR, HNBR, EPDM, FPM*
5 O-ring B	CR, NBR, HNBR, EPDM, FPM*	CR, NBR, HNBR, EPDM, FPM*
6 Spring-loaded U-ring	PTFE	PTFE
7 Flat sealing ring for threaded bush	AFM30	AFM30
8 Bonnet screw	8.8	A2-70
9 Stem	X8CrNiS18-9 1.4305	X8CrNiS18-9 1.4305
10 Flat sealing ring for bonnet	AFM30	AFM30
11 Bonnet	S355J2 1.0577	X8CrNiS18-9 1.4305 X5CrNi18-10 1.4301 X2CrNi19-11 1.4306
12 Valve disc	S355J2 1.0577	X8CrNiS18-9 1.4305 X5CrNi18-10 1.4301
13 Pilot valve disc	S355J2 1.0577	X8CrNiS18-9 1.4305
14 Flat sealing ring for valve disc	PTFE	PTFE


Part		Material for steel valves	Material for stainless steel valves
15	Flat sealing ring for pilot valve disc	PTFE	PTFE
16	Back seal	PTFE	PTFE
17	Body	S355J2 1.0577 P235GH 1.0345 P355N 1.0562 G20Mn5 +QT	X5CrNi18-10 1.4301 GX5CrNiMoNb19-11-2
18	Metal bellows	X6CrNiMoTi17-12-2 1.4571	X6CrNiMoTi17-12-2 1.4571

* depending on the refrigerant used

39 AVB D AE / AVB D AE DV

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVB steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

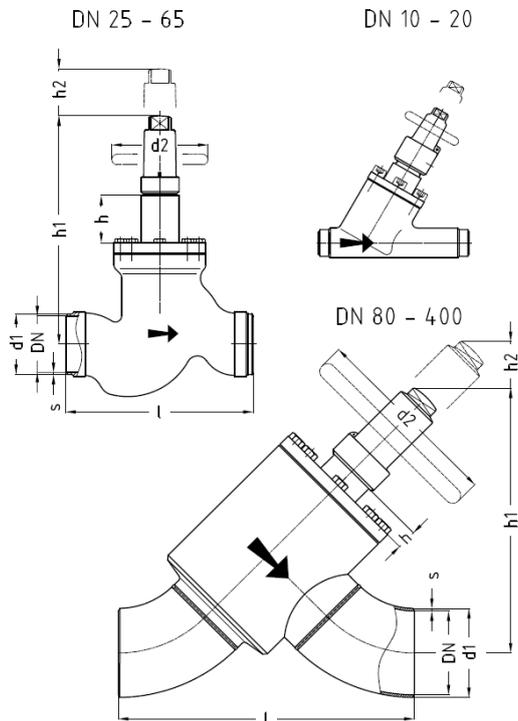

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [▶ 76]

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 10...20 3/8" ...3/4"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 25...350 1" ...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400 16"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:		Welding ends acc. to:														
		ISO Series 1		ISO Series 2		ANSI Sched 40		ANSI Sched 80								
DN	INCH	d1	s	d1	s	d1	s	d1	s	l	h	h*)	h1	h1*)	h2	d2
10	3/8"	17.2	1.8	15.0	2.5	17.1	2.3	17.1	3.2	130	19		136		55	60
15	1/2"	21.3	2.0	20.0	2.5	21.3	2.8	21.3	3.7	130	19		136		55	60
20	3/4"	26.9	2.3	25.0	2.5	26.7	2.9	26.7	3.9	150	19		136		55	60
25	1"	33.7	2.6	32.0	3.0	33.4	3.4	33.4	4.5	160	18	78	201	261	90	120
32	1 1/4"	42.4	2.6	38.0	3.0	42.2	3.6	42.2	4.8	180	18	78	202	262	90	120

Nominal size:		Welding ends acc. to:														
40	1 1/2"	48.3	2.6	45.0	3.0	48.3	3.7	48.3	5.1	200	13	73	234	294	110	140
50	2"	60.3	2.9	57.0	3.2	60.3	3.9			230	13	73	234	294	110	140
65	2 1/2"	76.1	2.9	76.1	3.6	73.0	5.2			290	8	78	262	332	130	140
80	3"	88.9	3.2	88.9	4.0	88.9	5.5			304	21	78	326	367	110	180
100	4"	114.3	3.6	108.0	4.0	114.3	6.0			386	7	88	348	405	110	180
125	5"	139.7	4.0	133.0	4.0	141.3	6.6			461	29	129	420	491	140	300
150	6"	168.3	4.5	159.0	4.5	168.3	7.1			537	5	105	437	508	150	400
200	8"	219.1	6.3			219.1	8.2			708	11	102	610	675	170	630
250	10"	273.0	7.1			273.0	9.3			875	100		739		220	630
300	12"	323.9	8.0			323.8	10.3			1048	107		829		280	630
350	14"	355.6	8.0			355.6	11.1			1215	107		906		350	630
400	16"	406.4	8.8			406.4	12.7			1380	112		1047		360	630


Table 35: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

40 AVB D AE NIRO / AVB D AE DV NIRO

D: Straight-way, **AE:** Welding ends, **DV:** Bonnet extension

AVB stainless steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

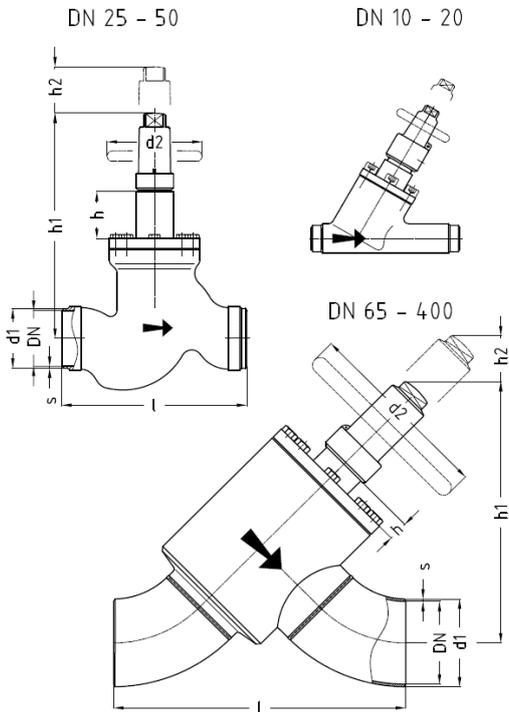

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [▶ 76]

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...20 3/8" ...3/4"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 25...350 1" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400 16"	PN25	25	25	25	25	PS [bar]

Nominal size:		Welding ends acc. to: s														
DN	INCH	ISO Series 1		ISO Series 2		ANSI Sched 40		ANSI Sched 80		l	h	h*)	h1	h1*)	h2	d2
		d1	s	d1	s	d1	s	d1	s							
10	3/8"	17.2	1.8	15.0	2.5	17.1	2.3	17.1	3.2	130	19		136		55	60
15	1/2"	21.3	2.0	20.0	2.5	21.3	2.8	21.3	3.7	130	19		136		55	60
20	3/4"	26.9	2.3	25.0	2.5	26.7	2.9	26.7	3.9	150	19		136		55	60
25	1"	33.7	2.6	32.0	3.0	33.4	3.4	33.4	4.5	160	18	78	201	261	90	120
32	1 1/4"	42.4	2.6	38.0	3.0	42.2	3.6	42.2	4.8	180	18	78	202	262	90	120

Nominal size:		Welding ends acc. to: s														
40	1 1/2"	48.3	2.6	45.0	3.0	48.3	3.7	48.3	5.1	200	13	73	234	294	110	140
50	2"	60.3	2.9	57.0	3.2	60.3	3.9			230	13	73	234	294	110	140
65	2 1/2"	76.1	2.9	76.1	3.6	73.0	5.2			256	8	78	248	298	100	140
80	3"	88.9	3.2	88.9	4.0	88.9	5.5			304	21	78	326	367	110	180
100	4"	114.3	3.6	108.0	4.0	114.3	6.0			386	7	88	348	405	110	180
125	5"	139.7	4.0	133.0	4.0	141.3	6.6			461	29	129	420	491	140	300
150	6"	168.3	4.5	159.0	4.5	168.3	7.1			537	5	105	437	508	150	400
200	8"	219.1	6.3			219.1	8.2			708	11	102	610	675	170	630
250	10"	273.0	7.1			273.0	9.3			875	100		739		220	630
300	12"	323.9	8.0			323.8	10.3			1048	107		829		280	630
350	14"	355.6	8.0			355.6	11.1			1215	107		906		350	630
400	16"	406.4	8.8			406.4	12.7			1380	112		1047		360	630


Table 36: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

41 AVB E AE / AVB E AE DV

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVB steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

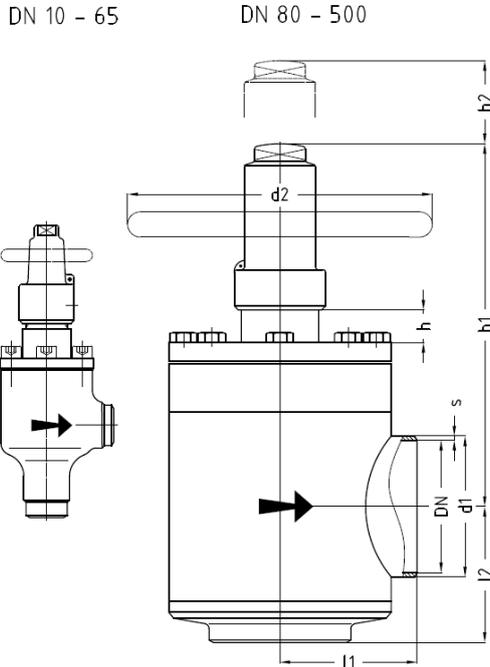

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [▶ 76]

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 10...65 3/8" ...2 1/2"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 80...350 10" ...14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400...500 16" ...20"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nom-inal size:		Welding ends acc. to:															
DN	INCH	ISO Series 1		ISO Series 2		ANSI Sched 40		ANSI Sche d 80		l1	l2	h	h*)	h1	h1*)	h2	d2
DN	INCH	d1	s	d1	s	d1	s	d1	s	l1	l2	h	h*)	h1	h1*)	h2	d2
10	3/8"	17.2	1.8	15.0	2.5	17.1	2.3	17.1	3.2	44	61	19		133		60	60
15	1/2"	21.3	2.0	20.0	2.5	21.3	2.8	21.3	3.7	44	61	19		133		60	60
20	3/4"	26.9	2.3	25.0	2.5	26.7	2.9	26.7	3.9	44	61	19		133		60	60
25	1"	33.7	2.6	32.0	3.0	33.4	3.4	33.4	4.5	60	60	18	78	180	240	90	120

Nom- inal size:	Welding ends acc. to:																
32	1 1/4"	42.4	2.6	38.0	3.0	42.2	3.6	42.2	4.8	60	60	18	78	180	240	90	120
40	1 1/2"	48.3	2.6	45.0	3.0	48.3	3.7	48.3	5.1	70	70	13	73	205	265	110	140
50	2"	60.3	2.9	57.0	3.2	60.3	3.9			70	70	13	73	205	265	110	140
65	2 1/2"	76.1	2.9	76.1	3.6	73.0	5.2			85	85	8	78	212	282	130	140
80	3"	88.9	3.2	88.9	4.0	88.9	5.5			100	100	21	78	291	350	150	180
100	4"	114.3	3.6	108.0	4.0	114.3	6.0			120	120	7	88	287	368	150	180
125	5"	139.7	4.0	133.0	4.0	141.3	6.6			135	135	29	129	360	456	190	300
150	6"	168.3	4.5	159.0	4.5	168.3	7.1			150	150	5	105	352	452	210	400
200	8"	219.1	6.3			219.1	8.2			195	195	11	102	513	608	240	630
250	10"	273.0	7.1			273.0	9.3			236	236	100		626		300	630
300	12"	323.9	8.0			323.8	10.3			283	283	107		673		385	630
350	14"	355.6	8.0			355.6	11.1			325	325	107		708		485	630
400	16"	406.4	8.8			406.4	12.7			365	365	112		832		500	630
500	20"	508.0	10.1			508.0	15.1			465	465	132		960		700	630


Table 37: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

42 AVB E AE NIRO / AVB E AE DV NIRO

E: Angle, **AE:** Welding ends, **DV:** Bonnet extension

AVB stainless steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

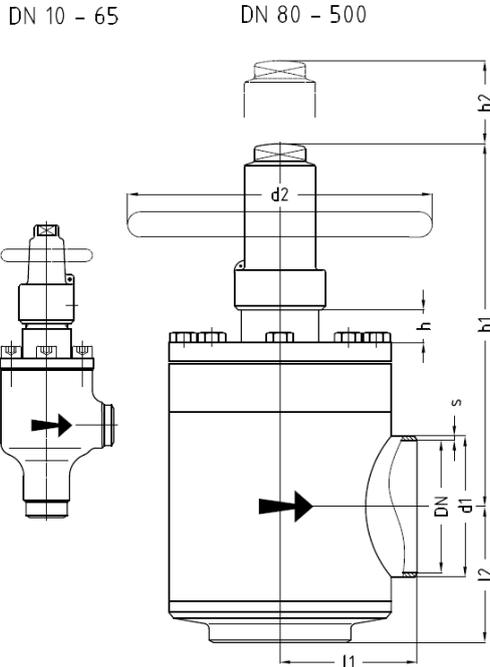

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [► 76]

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...65 3/8" ...2 1/2"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 80...350 10" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400...500 16" ...20"	PN25	25	25	25	25	PS [bar]

Nominal size:		Welding ends acc. to:															
DN	INCH	ISO Series 1		ISO Series 2		ANSI Sched 40		ANSI Sched 80		l1	l2	h	h*)	h1	h1*)	h2	d2
10	3/8"	d1	s	d1	s	d1	s	d1	s	44	61	19		133		60	60
15	1/2"	17.2	1.8	15.0	2.5	17.1	2.3	17.1	3.2	44	61	19		133		60	60
20	3/4"	21.3	2.0	20.0	2.5	21.3	2.8	21.3	3.7	44	61	19		133		60	60
25	1"	26.9	2.3	25.0	2.5	26.7	2.9	26.7	3.9	44	61	19		133		60	60
32	1 1/4"	33.7	2.6	32.0	3.0	33.4	3.4	33.4	4.5	60	60	18	78	180	240	90	120
		42.4	2.6	38.0	3.0	42.2	3.6	42.2	4.8	60	60	18	78	180	240	90	120

Nom- inal size:	Welding ends acc. to:																
40	1 1/2"	48.3	2.6	45.0	3.0	48.3	3.7	48.3	5.1	70	70	13	73	205	265	110	140
50	2"	60.3	2.9	57.0	3.2	60.3	3.9			70	70	13	73	205	265	110	140
65	2 1/2"	76.1	2.9	76.1	3.6	73.0	5.2			85	85	8	78	212	282	130	140
80	3"	88.9	3.2	88.9	4.0	88.9	5.5			100	100	21	78	291	350	150	180
100	4"	114.3	3.6	108.0	4.0	114.3	6.0			120	120	7	88	287	368	150	180
125	5"	139.7	4.0	133.0	4.0	141.3	6.6			135	135	29	129	360	456	190	300
150	6"	168.3	4.5	159.0	4.5	168.3	7.1			150	150	5	105	352	452	210	400
200	8"	219.1	6.3			219.1	8.2			195	195	11	102	513	608	240	630
250	10"	273.0	7.1			273.0	9.3			236	236	100		626		300	630
300	12"	323.9	8.0			323.8	10.3			283	283	107		673		385	630
350	14"	355.6	8.0			355.6	11.1			325	325	107		708		485	630
400	16"	406.4	8.8			406.4	12.7			365	365	112		832		500	630
500	20"	508.0	10.1			508.0	15.1			465	465	132		960		700	630


Table 38: Dimensions

*) for valve with bonnet extension, h2 = dismantling dimension

43 AVB D FL / AVB D FL DV

D: Straight-way, **FL:** Flanged ends, **DV:** Bonnet extension

AVB steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

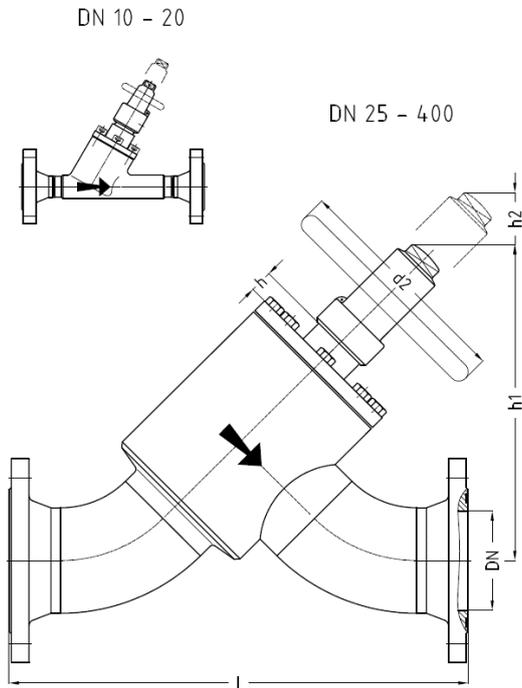

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [► 76]

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 10...65 3/8" ... 2 1/2"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 80...350 10" ... 14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400 16"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size: Flanged ends acc. to:

		AWP DN10-20 PN25 DN25-80 PN40	PN25 DIN 2634 EN1092-1	PN40 DIN 2635 EN1092-1	ANSI 300 RF						
DN	INCH	l	l	l	l	h	h*)	h1	h1*)	h2	d2
10	3/8"	196	202	202		19		136		55	60
15	1/2"	196	208	208	237	19		136		55	60
20	3/4"	216	232	232	266	19		136		55	60
25	1"	230	222	222	266	18	78	188	231	70	120
32	1 1/4"	244	240	240	286	18	78	191	233	70	120

Nominal size: Flanged ends acc. to:											
40	1 1/2"	235	248	248	295	13	73	208	251	80	140
50	2"	270	280	280	324	13	73	214	259	80	140
65	2 1/2"	365	362	362	410	8	78	248	298	100	140
80	3"	413	422	422	464	21	78	326	367	110	180
100	4"		518	518	560	7	88	348	405	110	180
125	5"		599	599	660	29	129	420	491	140	300
150	6"		689	689	736	5	105	437	508	150	400
200	8"		870	886	932	11	102	610	675	170	630
250	10"		1053	1087	1112	100	100		739	220	630
300	12"		1234	1280		1312	107		829		280
350	14"		1417	1467		1503	107		906		350
400	16"		1602	1652		1674	112		1047		360


Table 39: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension, DIN/EN flange facings with DIN 2512 groove as standard

44 AVB D FL NIRO / AVB D FL DV NIRO

D: Straight-way, **FL:** Flanged ends, **DV:** Bonnet extension

AVB stainless steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

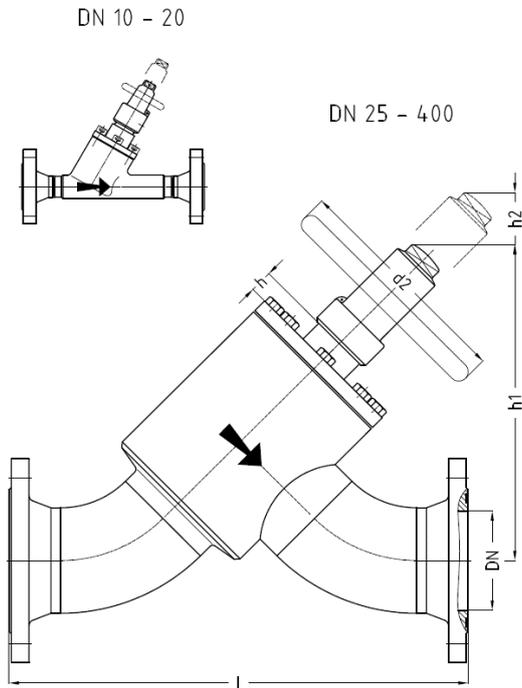

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [► 76]

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...65 3/8" ...2 1/2"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 80...350 10" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400 16"	PN25	25	25	25	25	PS [bar]

Nominal size: Flanged ends acc. to:

		AWP DN10-20 PN25 DN25-80 PN40	PN25 DIN 2634 EN1092-1	PN40 DIN 2635 EN1092-1	ANSI 300 RF						
DN	INCH	l	l	l	l	h	h*)	h1	h1*)	h2	d2
10	3/8"	196	202	202		19		136		55	60
15	1/2"	196	208	208	237	19		136		55	60
20	3/4"	216	232	232	266	19		136		55	60
25	1"	230	222	222	266	18	78	188	231	70	120
32	1 1/4"	244	240	240	286	18	78	191	233	70	120

Nominal size: Flanged ends acc. to:											
40	1 1/2"	235	248	248	295	13	73	208	251	80	140
50	2"	270	280	280	324	13	73	214	259	80	140
65	2 1/2"	365	362	362	410	8	78	248	298	100	140
80	3"	413	422	422	464	21	78	326	367	110	180
100	4"		518	518	560	7	88	348	405	110	180
125	5"		599	599	660	29	129	420	491	140	300
150	6"		689	689	736	5	105	437	508	150	400
200	8"		870	886	932	11	102	610	675	170	630
250	10"		1053	1087	1112	100	100		739	220	630
300	12"		1234	1280		1312	107		829		280
350	14"		1417	1467		1503	107		906		350
400	16"		1602	1652		1674	112		1047		360


Table 40: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension, DIN/EN flange facings with DIN 2512 groove as standard

45 AVB E FL / AVB E FL DV

E: Angle, **FL:** Flanged ends, **DV:** Bonnet extension

AVB steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

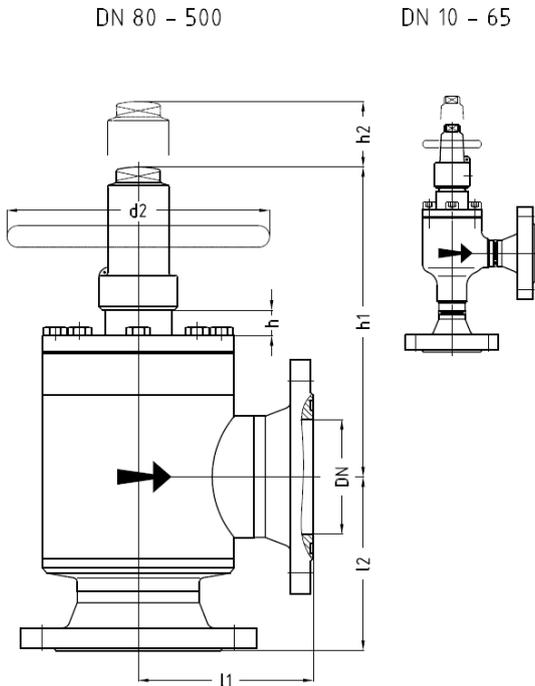

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV [► 76]**

DN / INCH	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 10...65 3/8" ... 2 1/2"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 80...350 10" ... 14"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 400...500 16" ... 20"	PN25	6.25	12.5	18.7	25	25	25	PS [bar]

Nominal size:		Flanged ends acc. to:													
		AWP DN10-20 PN25 DN25-80 PN40		PN25 DIN 2634 EN1092-1		PN40 DIN 2635 EN1092-1		ANSI 300 RF							
DN	INCH	l1	l2	l1	l2	l1	l2	l1	l2	h	h*)	h1	h1*)	h2	d2
10	3/8"	77	94	80	97	80	97			19		133		60	60
15	1/2"	77	94	83	100	83	100	97	114	19		133		60	60
20	3/4"	77	94	85	102	85	102	102	119	19		133		60	60
25	1"	105	105	101	101	101	101	123	123	18	78	180	240	90	120
32	1 1/4"	105	105	103	103	103	103	126	126	18	78	180	240	90	120

Nominal size:		Flanged ends acc. to:													
40	1 1/2"	110	110	116	116	116	116	139	139	13	73	205	265	110	140
50	2"	114	114	119	119	119	119	141	141	13	73	205	265	110	140
65	2 1/2"	140	140	138	138	138	138	162	162	8	78	212	282	130	140
80	3"	155	155	159	159	159	159	180	180	21	78	291	350	150	180
100	4"			186	186	186	186	207	207	7	88	287	368	150	180
125	5"			204	204	204	204	235	235	29	129	360	456	190	300
150	6"			226	226	226	226	250	250	5	105	352	452	210	400
200	8"			276	276	284	284	308	308	11	102	513	608	240	630
250	10"			325	325	342	342	355	355	100		626		300	630
300	12"			376	376	399	399	415	415	107		673		385	630
350	14"			426	426	451	451	469	469	107		708		485	630
400	16"			476	476	501	501	512	512	112		832		500	630
500	20"			591	591	606	606	628	628	132		960		700	630


Table 41: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension, DIN/EN flange facings with DIN 2512 groove as standard

46 AVB E FL NIRO / AVB E FL DV NIRO

E: Angle, **FL:** Flanged ends, **DV:** Bonnet extension

AVB stainless steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

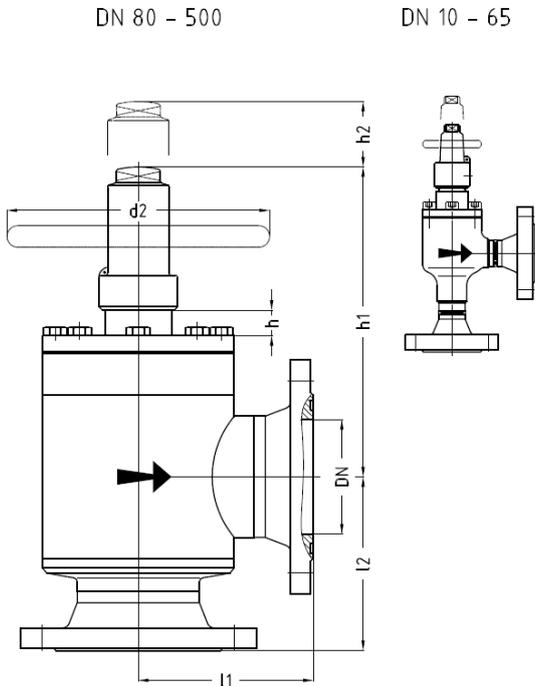

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

From DN300 – with pilot plug and reverse flow direction, see **AVB E FL / AVB E FL DV** [► 76]

DN / INCH	PN	-60	-10	+50	+150	TS [°C]
DN 10...65 3/8" ...2 1/2"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 80...350 10" ...14"	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 400...500 16" ...20"	PN25	25	25	25	25	PS [bar]

Nominal size:		Flanged ends acc. to:													
		AWP DN10-20 PN25 DN25-80 PN40		PN25 DIN 2634 EN1092-1		PN40 DIN 2635 EN1092-1		ANSI 300 RF							
DN	INCH	l1	l2	l1	l2	l1	l2	l1	l2	h	h*)	h1	h1*)	h2	d2
10	3/8"	77	94	80	97	80	97			19		133		60	60
15	1/2"	77	94	83	100	83	100	97	114	19		133		60	60
20	3/4"	77	94	85	102	85	102	102	119	19		133		60	60
25	1"	105	105	101	101	101	101	123	123	18	78	180	240	90	120
32	1 1/4"	105	105	103	103	103	103	126	126	18	78	180	240	90	120

Nominal size:		Flanged ends acc. to:													
40	1 1/2"	110	110	116	116	116	116	139	139	13	73	205	265	110	140
50	2"	114	114	119	119	119	119	141	141	13	73	205	265	110	140
65	2 1/2"	140	140	138	138	138	138	162	162	8	78	212	282	130	140
80	3"	155	155	159	159	159	159	180	180	21	78	291	350	150	180
100	4"			186	186	186	186	207	207	7	88	287	368	150	180
125	5"			204	204	204	204	235	235	29	129	360	456	190	300
150	6"			226	226	226	226	250	250	5	105	352	452	210	400
200	8"			276	276	284	284	308	308	11	102	513	608	240	630
250	10"			325	325	342	342	355	355	100		626		300	630
300	12"			376	376	399	399	415	415	107		673		385	630
350	14"			426	426	451	451	469	469	107		708		485	630
400	16"			476	476	501	501	512	512	112		832		500	630
500	20"			591	591	606	606	628	628	132		960		700	630

Table 42: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension, DIN/EN flange facings with DIN 2512 groove as standard


See also

 [AVB E FL / AVB E FL DV \[► 76\]](#)

47 AVB D LE / AVB D LE DV

D: Straight-way, **LE:** Soldering ends, **DV:** Bonnet extension

AVB steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

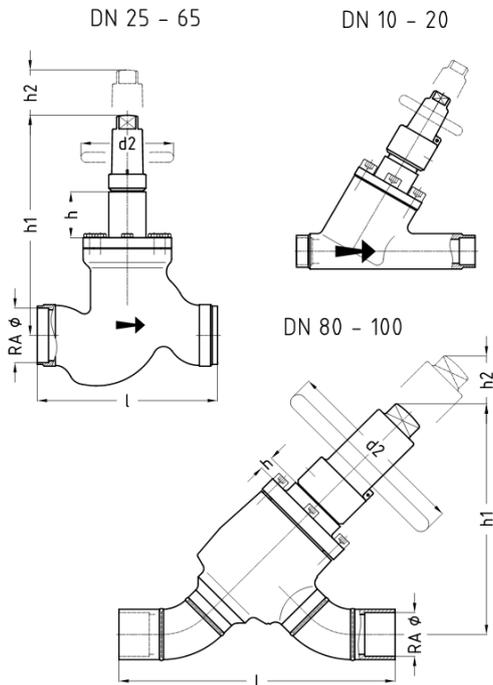

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 10...20	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 25...100	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]

Nominal size:		Soldering ends acc. to:							
DN	RAØ	l	h	h*)	h1	h1*)	h2	d2	
10	12	130	19		136		55	60	
15	15	130	19		136		55	60	
15	18	130	19		136		55	60	
20	22	150	19		136		55	60	
25	28	160	18	78	201	261	90	120	
32	35	180	18	78	202	262	90	120	
40	42	200	13	73	234	294	110	140	
50	54	230	13	73	234	294	110	140	
65	64	290	8	78	262	332	130	140	
65	76	290	8	78	262	332	130	140	
80	89	406	21	78	326	367	110	180	

Nominal size:	Soldering ends acc. to:							
100	108	518	7	88	348	405	110	180


Table 43: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

48 AVB D LE NIRO / AVB D LE DV NIRO

D: Straight-way, **LE:** Soldering ends, **DV:** Bonnet extension

AVB stainless steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

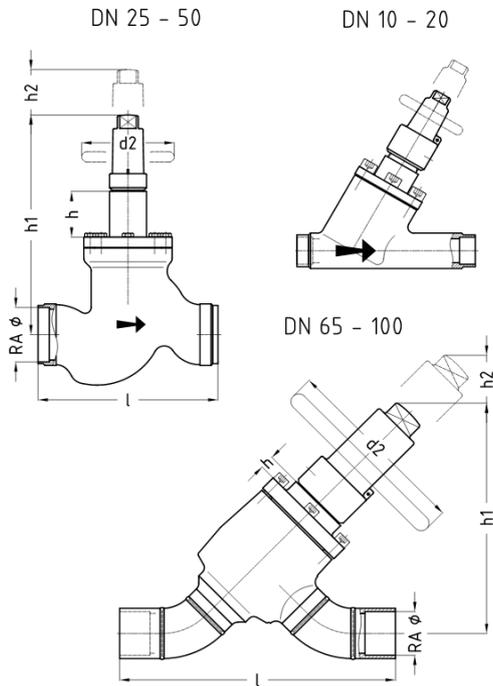

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 10...20	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 25...100	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]

Nominal size:		Soldering ends acc. to:							
DN	RAØ	l	h	h*)	h1	h1*)	h2	d2	
10	12	130	19		136		55	60	
15	15	130	19		136		55	60	
15	18	130	19		136		55	60	
20	22	150	19		136		55	60	
25	28	160	18	78	201	261	90	120	
32	35	180	18	78	202	262	90	120	
40	42	200	13	73	234	294	110	140	
50	54	230	13	73	234	294	110	140	
65	64	366	8	78	248	298	100	140	
65	76	366	8	78	248	298	100	140	
80	89	406	21	78	326	367	110	180	

Nominal size:	Soldering ends acc. to:							
100	108	518	7	88	348	405	110	180


Table 44: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

49 AVB E LE / AVB E LE DV

E: Angle, **LE:** Soldering ends, **DV:** Bonnet extension

AVB steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

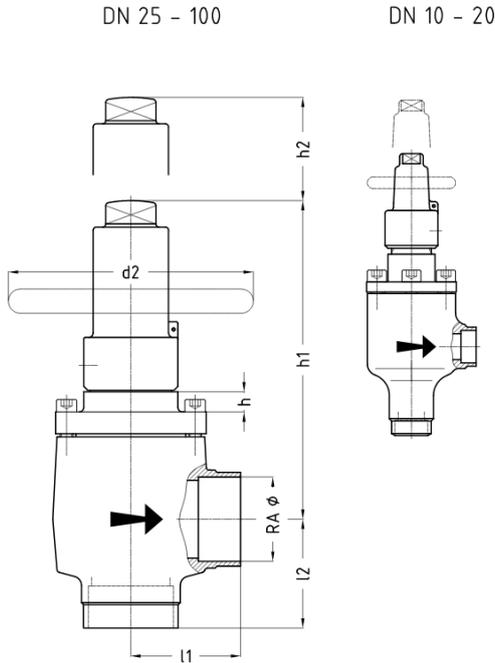

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-40	-25	-10	+50	+150	TS [°C]
DN 10...20	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]
DN 25...100	PN25	6.25	12.5	18.7	25	25	25	PS [bar]
	PN40	10	20	30	40	40	40	PS [bar]

Nominal size: Soldering ends acc. to:											
DN	RAØ	l1	l2	h	h*)	h1	h1*)	h2	d2		
10	12	44	61	19		133		60	60		
15	15	44	61	19		133		60	60		
15	18	44	61	19		133		60	60		
20	22	44	61	19		133		60	60		
25	28	60	60	18	78	180	240	90	120		
32	35	60	60	18	78	180	240	90	120		
40	42	70	70	13	73	205	265	110	140		
50	54	70	70	13	73	205	265	110	140		
65	64	140	140	8	78	212	282	130	140		
65	76	140	140	8	78	212	282	130	140		

Nominal size:	Soldering ends acc. to:									
80	89	151	151	21	78	291	350	150	180	
100	108	186	186	7	88	287	368	150	180	


Table 45: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

50 AVB E LE NIRO / AVB E LE DV NIRO

E: Angle, **LE:** Soldering ends, **DV:** Bonnet extension

AVB stainless steel shut-off valve - stem seal with metal bellows for natural refrigerants (NH₃, CO₂) and non-corrosive gases and liquids according to EN 378-1 as well as brines

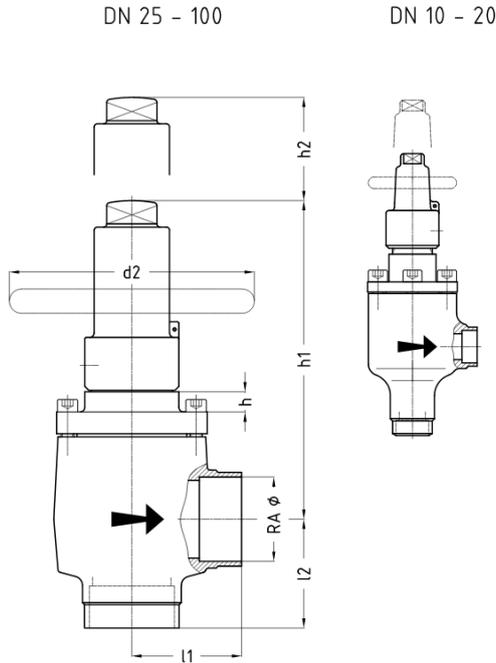

Pressure / temperature operating limits:

PS: Max. permissible operating pressure in bar

TS: Permissible operating temperature in °C associated with the permissible operating pressures (PS)

PN: Nominal pressure rating

DN	PN	-60	-10	+50	+150	TS [°C]
DN 10...20	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]
DN 25...100	PN25	25	25	25	25	PS [bar]
	PN40	40	40	40	40	PS [bar]

Nominal size: Soldering ends acc. to:											
DN	RAØ	l1	l2	h	h*)	h1	h1*)	h2	d2		
10	12	44	61	19		133		60	60		
15	15	44	61	19		133		60	60		
15	18	44	61	19		133		60	60		
20	22	44	61	19		133		60	60		
25	28	60	60	18	78	180	240	90	120		
32	35	60	60	18	78	180	240	90	120		
40	42	70	70	13	73	205	265	110	140		
50	54	70	70	13	73	205	265	110	140		
65	64	140	140	8	78	212	282	130	140		
65	76	140	140	8	78	212	282	130	140		


Nominal size:	Soldering ends acc. to:									
80	89	151	151	21	78	291	350	150	180	
100	108	186	186	7	88	287	368	150	180	

Table 46: Dimensions

*) for valves with bonnet extension, h2 = dismantling dimension

51 Appendix

52 Pilot valve disc

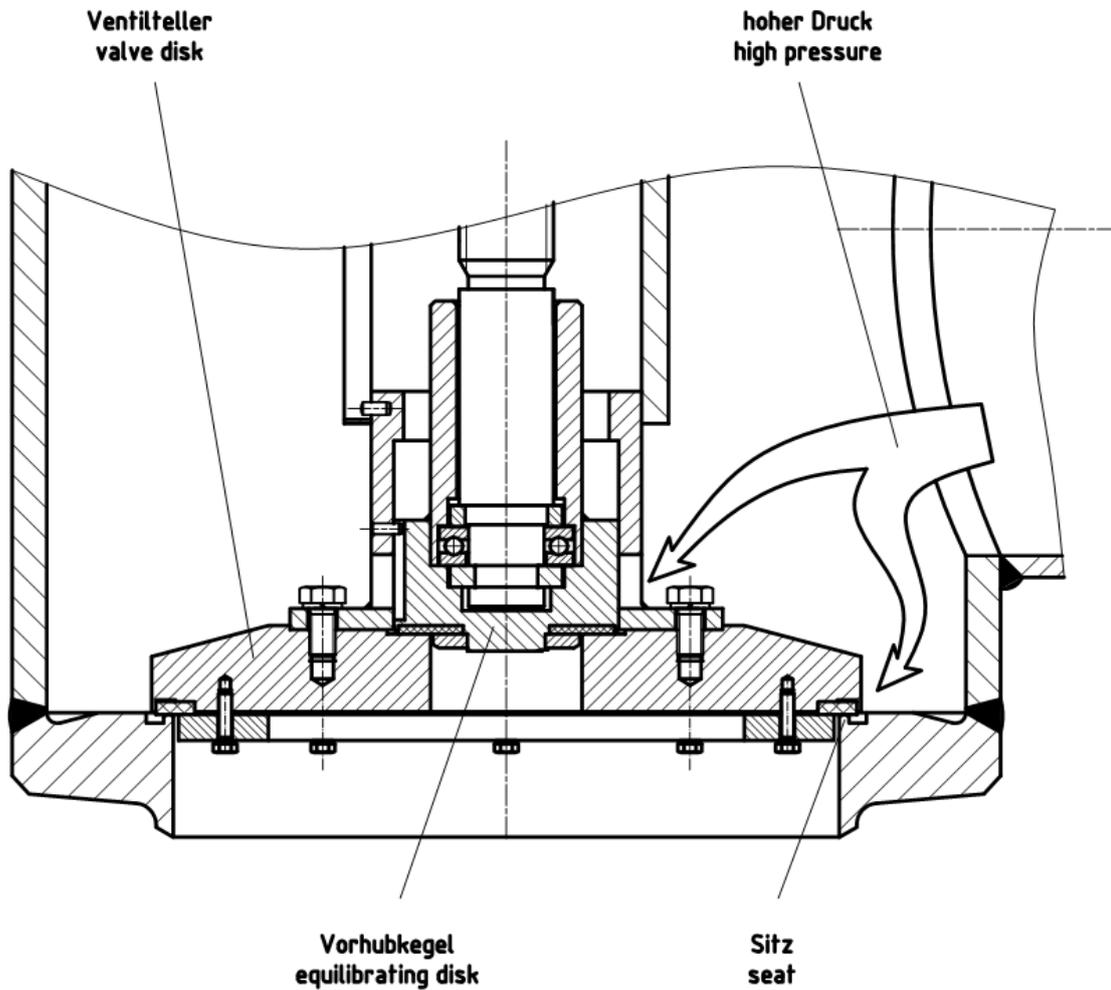

GEA AWP valves in nominal sizes 300 and larger are equipped with pilot valve discs.

Install valves with a valve disc with pilot lift in such a way that the higher pressure is present on the upper side of the valve disc when the valve is closed. In this installation position, GEA AWP valves are tight at closing pressure differentials up to the nominal pressure. If this is not guaranteed, i.e. the higher pressure is present under the valve disc, GEA AWP shut-off valves comply with the permissible closing pressure differentials in accordance with DIN EN 12284.


Closing pressure differentials according to EN 12284

Nominal pressure	Max. pressure diff.	Closing pressure differentials according to EN 12284									
		DN 100	DN 125	DN 150	DN 200	DN 250	DN 300	DN 350	DN 400	DN 500	
PN25	Δp (bar)	-	-	21	14	9	6	4.5	3.5	2	
PN40	Δp (bar)	-	33	21	14	9	6	4.5	3.5	2	
PN63	Δp (bar)	44	33	21	14	9	6	4.5	3.5	2	

53 Valve stem sealing system

The valve stem sealing system is maintenance-free.

The sealing system consists of the following components:

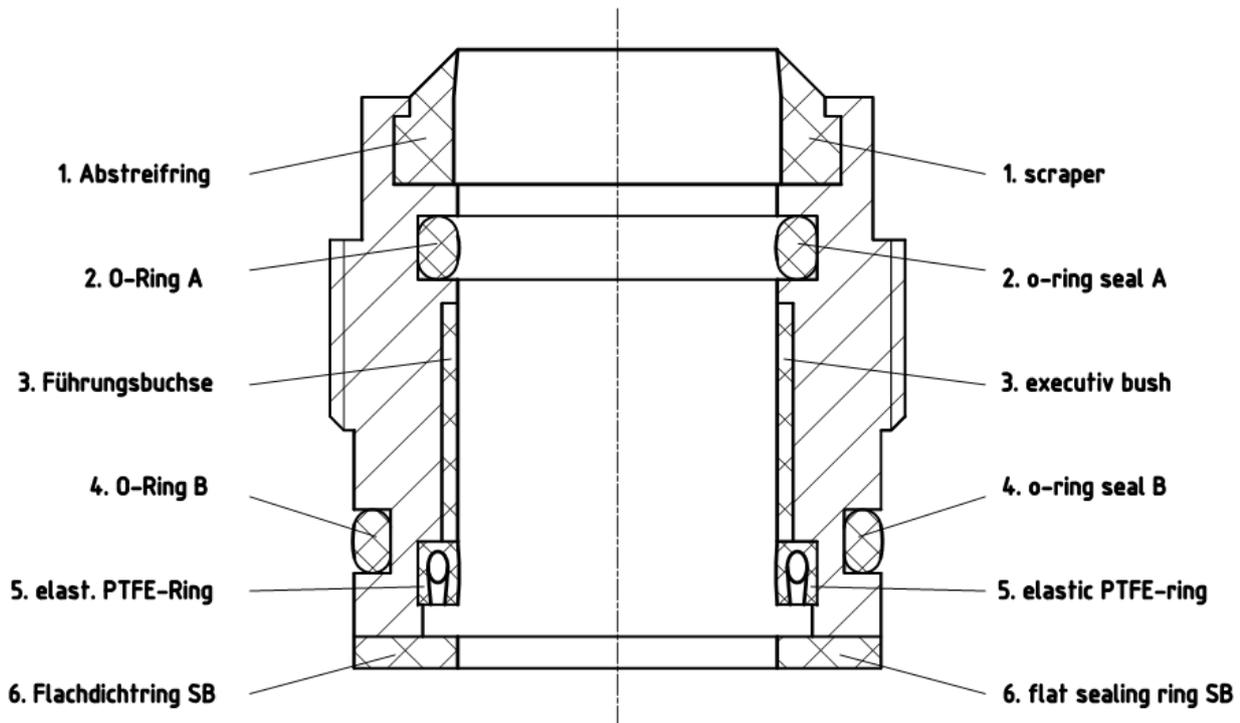

1. Wiper ring

The wiper ring prevents the ingress of dirt and water from the outside.

2. O-ring A

O-ring A makes the valve vacuum-tight. (Valve operation in the vacuum range at low temperatures)

3. Guide bush

The guide bush prevents damage to the stem.

4. O-ring B

O-ring B seals the outer part of the sealing system in addition to the flat sealing ring SB.

5. Resilient PTFE ring

The resilient PTFE ring is the primary seal of the sealing system. It consists of a high-performance PTFE compound with a wound stainless steel spring. This seal seals the valve to the atmosphere.

6. Flat sealing ring SB




The flat sealing ring SB seals the outer part of the sealing system.

Note: GEA AWP valves have a back seal. Therefore, the removal and replacement of the sealing system is possible during operation of the plant. Please observe the instructions in our operating regulations regarding this.

54 Handwheel / Cap

HR

DN 6-500

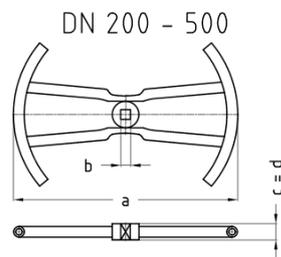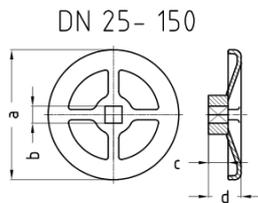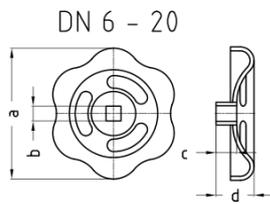
for type: HRS AVR AVB HRAR HRAB RVA RVAK

	Diameter	Hub square	Hub height	Height
DN	a	b	c	d
6-20	60	6	9	15
25-32	120	11	14	31.0
40-65	140	12	16	32.5
80-100	200	14	22	42.0
125	315	22	28	55
150	400	22	28	60
200-500	630	28	46	46


Table 47: Dimensions

K

Cap

DN 6-500

DN 6 - 500

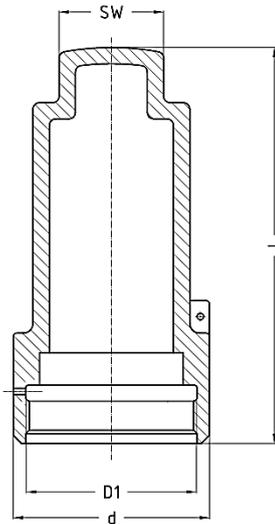**for type: AVR AVB HRAR HRAB RVA RVAK**

	Height	Diameter	Thread	Wrench size
DN	l	d	D1	SW
6-20	65	36	M27x2	19
25-32	99	45	M36x2	24
40-65	122	60	M52x3	32
80-100	148	72	M60x3	41
125-150	165	90	M76x3	50
200-350	260	100	M80x3	60
400	319	100	M80x3	90
500	325	100	M80x3	90

Table 48: Dimensions

55 Comparison of European / American materials

GEA AWP valves contain individual parts in different materials. The following table contains all materials that GEA AWP uses for pressure-retaining parts and lists the equivalent American materials.

European material			American equivalent material	
Material number	Short name	Standard	Material standard	Grade
Valves made of carbon steel				
1.0345	P235GH, TC1 +N	DIN EN 10216-2	ASTM A106	A + B
1.0038	S235JR +N	DIN EN 10025-2	ASTM A570	36
1.0425	P265GH	DIN EN 10028-2	ASTM A516	60
1.0577	S355J2 +N	DIN EN 10025-2	ASTM A516	65
1.0562	P355N	DIN EN 10028-3		
1.6220	G20Mn5 +QT	DIN EN 10213	ASTM A352	LCC
1.0460	C22.8	VdTÜV 350/3	ASTM A105	-
Valves made of low-temperature steel				
1.0451	P215NL +N	DIN EN 10216-4	ASTM A333	6
1.0452	P255QL +QT	DIN EN 10216-4		
1.0566	P355NL1 +N	DIN EN 10028-3 DIN 17103 VdTÜV 354/3	ASTM A662 ASTM A420 ASTM A350	B WPL6 LF2
1.0488	TStE 285	DIN 17103 VdTÜV 352/3	ASTM A662 ASTM A350	A LF2
1.6220	G20Mn5 +QT	DIN EN 10213	ASTM A352	LCC
Valves made of stainless steel				
1.4301	X5CrNi18-10	DIN EN 10216-5 DIN EN 10028-7 DIN EN 10222-5 DIN EN 1092-1	ASTM A312 ASTM A240 ASTM A182	TP304 304 F304
1.4581	GX5CrNiMoNb19-11-2	DIN EN 10213	ASTM A351	CF10M

Straight-way valves in non-standard design (e.g. deviating materials, third-party inspection) are only available in angle-seat form.

56 Coding of connections for small and service valves

GEA AWP valves can be manufactured with a variety of connection variants:

DN	Thread	Code	Welding ends		Dimensions	Code
DN8	M12x1.5 RA6	AL	DN6	R1	Ø10.2x1.6	C0
DN8	M12x1.5-taper	AY		ANSI 40	Ø1/8"x1.7	C1
DN8	M14x1.5 RA8	A4		ANSI 80	Ø1/8"x2.4	C2
DN8	M16x1.5 RA8	A5				
DN8	M16x1.5 RA10	A6	DN8	R1	Ø13.5x1.8	D0
DN8	M16x1.5-i	AZ		ANSI 40	Ø1/4"x2.2	D1
DN8	M16x1.5-taper	AC		ANSI 80	Ø1/4"x3.0	D2
DN8	M18x1.5 RA10	A7		12x2	Ø12x2.0	D3
DN8	M18x1.5 RA12	A8		12x3	Ø12x3.0	D4
DN8	M20x1.5 RA12	A9		R1 ext. L2=130 Niro	Ø13.5x1.8	D5
DN8	M22x1.5 RA14	AA		R1 ext. L2=130 C- St.	Ø13.5x1.8	D6
DN8	M22x1.5 RA15	AB				
DN8	M22x1.5	A0	DN10	R1	Ø17.2x1.8	E0
DN8	M22x1.5-taper	AD		ANSI 40	Ø3/8"x2.3	E1
DN20	M26x1.5 RA18	AS		ANSI 80	Ø3/8"x3.2	E2
DN20	M30x2 RA22	AT		R2	Ø15x2.5	E3
DN8	G1/4"	AF		18x3	Ø18x3.0	E4
DN8	G1/4"-taper	AG		R1 ext. L2=130 Niro	Ø17.2x1.8	E5
DN8	G1/4"-i	AH		R1 ext. L2=130 C- St.	Ø17.2x1.8	E6
DN8	G3/8"	AK		16x4 ext.L2=13 0 NIRO	Ø16x4.0	E7
DN8	G3/8"-i	AM		17,2x2	Ø17.2x2.0	E8
DN8	G3/8" RA10	AJ	DN8	R1 ext. L2=120 C- St.	Ø17.2x1.8	E9
DN8	G1/2"	A1		R1 ext. L2=140 Niro	Ø17.2x1.8	EA
DN8	G1/2"-LH	A2		R1 ext. L2=140 C- St.	Ø17.2x1.8	EB
DN8	G1/2" RA12	AN	DN8	R1 ext. L2=60 Niro	Ø17.2x1.8	EC

DN	Thread	Code	Welding ends		Dimensions	Code
DN8	G1/2"-i	AU		R1 ext. L2=60 C- St.	Ø17.2x1.8	ED
DN8	G1/2" UM *)	AV		18x4 ext.L2=14 0 Niro	Ø18x4.0	EE
DN8	G1/2" **)	AW		18x4 ext.L2=14 0C-St	Ø18x4.0	EF
DN8	G1/2"-taper	AX		18x4 ext.L2=60 Niro	Ø18x4.0	EG
DN20	G3/4"	AE		18x4 ext.L2=60 C-St.	Ø18x4.0	EH
DN20	G3/4" RA18	AP				
DN8	1/4"NPT-male	A3	DN15	R1	Ø21.3x2.0	F0
DN8	1/4"NPT-female	AR		ANSI 40	Ø1/2"x2.8	F1
DN8	3/8"NPT-male	AI		ANSI 80	Ø1/2"x3.7	F2
DN8	3/8"NPT-female	B2		R2	Ø20x2.5	F3
DN8	1/2"NPT-male	B0		R1 ext. L2=130 Niro	Ø21.3x2.0	F5
DN8	1/2"NPT-female	B1		R1 ext. L2=130 C- St.	Ø21.3x2.0	F6
DN20	3/4"NPT-male	B3		R1 ext. L2=180 NIRO	Ø21.3x2.0	F7
DN8	M10-a	B4		ANSI 80 L2=130 C- St	Ø21.3x3.7	F8
DN20	G1"	B6	*) rotatable, welded to body			
DN8	G3/8" BSPT-male	B7				
DN8	G3/8" BSPT-female	B8	**) for one-piece blind nut			
DN8	3/8-18 NPTF-male	B9				
DN8	R3/8"-taper	BA				

i = female thread, a = male thread

These connections can be equipped with accessories.

	Accessories	Short designation	Code
UM+ST	Union nut with welding nipple	UM+ST	1
BM	Blind nut	BM	2
DM	Double nut left/right	DM	3
UM+SKB	Union nut with weld ball nipple	UM+SKB	4
UM+SR	Union nut with cutting ring	UM+SR	5

	Accessories	Short designation	Code
UM+SLT	Union nut with hose nipple	UM+SLT	6
DM+ad- apter	Double nut with adapter G1/2"-a/ G1/4"-i	DM+adapter	7
UM+KKR	Union nut with clamping ring	UM+KKR	9

57 Accessories for AVR, HRAR, RV, RVA, RVAK, SS, UVA


- UM+ST Union nut with welding nipple and gasket
- BM Blind nut with gasket
- DM Double nut right-hand/left-hand with gasket
- UM+SLT Union nut with hose nipple and gasket
- UM+SKB Union nut with weld ball nipple
- UM+SR Union nut with cutting ring

TYPE	AWP code	Description
UM+ST G3/8"	00060F07A5A0AK01	Union nut G3/8", welding nipple 10.2x1.6, gasket 10x13.5x1.5-Al
UM+ST G1/2"	00060F07A5A0A101	Union nut G1/2", welding nipple 13.5x1.8, gasket 13x18x1.5-Al
UM+ST G3/4"	00060F07A5A0AE01	Union nut G3/4", welding nipple 17.2x2.0, gasket 17x22x1.5-Al
UM+ST G1"	00060F07A5A0B601	Union nut G1" + welding nipple 21.3x2.0 + gasket 22x27x1.5-Al
BM 8 (G1/2")	00060F07A5A0A102	Blind nut G1/2", gasket 13x18x1.5-Al G1/2"
BM 10 (G3/4")	00060F07A5A0AE02	Blind nut G3/4", gasket 17x22x1.5-Al G3/4"
DM G1/2"-G1/2"L	00060F07A5A0A203	Left-right nut G1/2", gasket 13x18x1.5-Al
UM+SLT	00060F07A5A0A106	One-piece hose nipple G1/2" + gasket 13x18x1.5-Al
UM+SKB 6 RA6	00060F07A5A0AL04	Union nut M12x1.5 RA6, weld ball nipple SKA 6x1.5
UM+SKB 8 RA10	00060F07A5A0A604	Union nut M16x1.5 RA10, weld ball nipple SKA 10x1.5
UM+BM 8 RA10	00060F07A5A0A602	Union nut with blind plug M16x1.5 RA10
UM+SKB 8 RA12	00060F07A5A0A804	Union nut M18x1.5 RA12, weld ball nipple SKA 12x2.0
UM+BM 8 RA12	00060F07A5A0A802	Union nut with blind plug M18x1.5 RA12
UM+SKB G1/2" RA12	00060F07A5A0AN04	Union nut G1/2" RA12, weld ball nipple SKA 12x2 RA12
UM+BM G1/2" RA12	00060F07A5A0AN02	Union nut with blind plug G1/2" RA12
UM+SR 6 L6	00060F07A5A0AL05	Union nut M12x1.5 RA6, cutting ring L6
UM+SR 8 L10	00060F07A5A0A605	Union nut M16x1.5 RA10, cutting ring L10
UM+SR 8 L12	00060F07A5A0A805	Union nut M18x1.5 RA12, cutting ring L12
UM+SR G1/2" RA12	00060F07A5A0AN05	Union nut G1/2" RA12, cutting ring L12

58 Welding neck flanges - DIN 2634/2635

- DIN-FL
- DIN-FL N
- DIN-FL F
- DIN-FL C
- DIN-FL D
- FL - flange
- Form N - groove DIN 2512
- Form F - tongue DIN 2512
- Form C - smooth flange facing (Rz 160) DIN 2526
- Form D - smooth flange facing (Rz 40) DIN 2526

DN 10-150 DIN 2635 PN 40,
DN 200 DIN 2634 PN 25

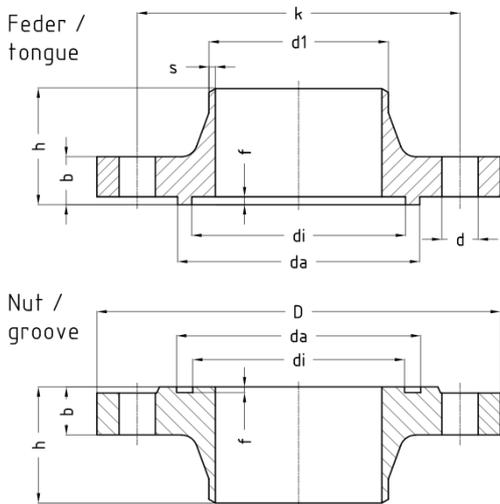

Installation lengths in mm:


DIN2634 PN25 DN10-150 / DIN 2635 PN40 DN10-500																				
Welding ends					Flange facing design											Screws			Sealing ring	
Series 1		Series 2			Groove						Tongue					DIN 931			DIN 2691	
DN	d1	s	d1	s	b	k	h	d	D	di	da	f	di	da	f	Quant-ity	Thread	Lengt h	di	da
10	17.2	1.8	15.0	2.5	1 6	60	35	1 4	90	23	35	2. 5	24	34	4. 0	4	M 12	45	24	34
15	21.3	2.0	20.0	2.5	1 6	65	38	1 4	95	28	40	2. 5	29	39	4. 0	4	M 12	45	29	39
20	26.9	2.3	25.0	2.5	1 8	75	40	1 4	10 5	35	51	2. 5	36	50	4. 0	4	M 12	50	36	50
25	33.7	2.6	32.0	3.0	1 8	85	40	1 4	11 5	42	58	2. 5	43	57	4. 0	4	M 12	50	43	57

DIN2634 PN25 DN10-150 / DIN 2635 PN40 DN10-500																				
32	42.4	2.6	38.0	3.0	1 8	10 0	42	1 8	14 0	50	66	2. 5	51	65	4. 0	4	M 16	55	51	65
40	48.3	2.6	45.0	3.0	1 8	11 0	45	1 8	15 0	60	76	2. 5	61	75	4. 0	4	M 16	55	61	75
50	60.3	2.9	57.0	3.2	2 0	12 5	48	1 8	16 5	72	88	2. 5	73	87	4. 0	4	M 16	60	73	87
65	76.1	2.9	76.1	3.6	2 2	14 5	52	1 8	18 5	94	11 0	2. 5	95	10 9	4. 0	8	M 16	60	95	109
80	88.9	3.2	88.9	4.0	2 4	16 0	58	1 8	20 0	10 5	12 1	2. 5	10 6	12 0	4. 0	8	M 16	65	106	120
100	114.3	3.6	108.0	4.0	2 4	19 0	65	2 2	23 5	12 8	15 0	3. 0	12 9	14 9	4. 5	8	M 20	70	129	149
125	139.7	4.0	133.0	4.0	2 6	22 0	68	2 6	27 0	15 4	17 6	3. 0	15 5	17 5	4. 5	8	M 24	80	155	175
150	168.3	4.5	159.0	4.5	2 8	25 0	75	2 6	30 0	18 2	20 4	3. 0	18 3	20 3	4. 5	8	M 24	80	183	203
200	219.1	6.3			3 4	32 0	88	3 0	37 5	23 8	26 0	3. 0	23 9	25 9	4. 5	12	M 27	100	239	259
250	273.0	7.1			3 8	38 5	105	3 3	45 0	29 1	31 3	3. 0	29 2	31 2	4. 5	12	M 30	110	292	312
300	323.9	8.0			4 2	45 0	115	3 3	51 5	34 2	36 4	3. 0	34 3	36 3	4. 5	16	M 30	120	343	363
350	355.6	8.8			4 6	51 0	125	3 6	58 0	39 4	42 2	3. 5	39 5	42 1	5. 0	16	M 33	130	395	421
400	406.4	11.0			5 0	58 5	135	3 9	66 0	44 6	47 4	3. 5	44 7	47 3	5. 0	16	M 36	140	447	473
500	508.0	14.2			5 2	67 0	140	4 2	75 5	54 8	57 6	3. 5	54 9	57 5	5. 0	20	M 39	150	549	575

59 Welding neck flanges - DIN 2634/2636/2637

- DIN-FL
- DIN-FL N
- DIN-FL F
- DIN-FL C
- DIN-FL D
- FL - flange
- Form N - groove DIN 2512
- Form F - tongue DIN 2512
- Form C - smooth flange facing (Rz 160) DIN 2526
- Form D - smooth flange facing (Rz 40) DIN 2526

DN 10-150 DIN 2635 PN 40,
DN 200 DIN 2634 PN 25

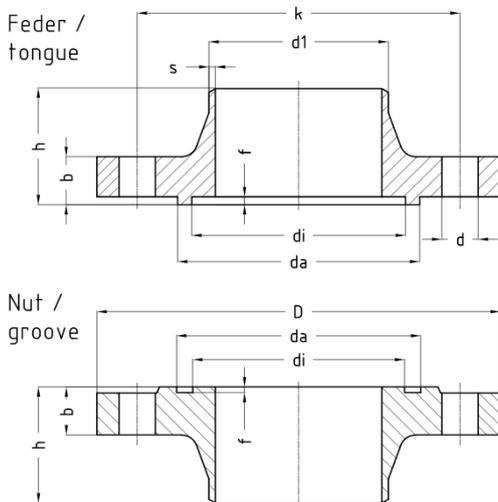

Installation lengths in mm:


DIN 2634 PN25 DN200-500																		
DN	Welding ends			Flange facing design									Screws			Sealing ring		
	Series 1			Groove					Tongue				DIN 931			DIN 2691		
	d1	s	b	k	h	d	D	di	da	f	di	da	f	Quant-ity	Thread	Lengt h	di	da
200	219.1	6.3	30	310	80	26	360	238	260	3.0	239	259	4.5	12	M 24	90	239	259
250	273.0	7.1	32	370	88	30	425	291	313	3.0	292	312	4.5	12	M 27	90	292	312
300	323.9	8.0	34	430	92	30	485	342	364	3.0	343	363	4.5	16	M 27	100	343	363
350	355.6	8.0	38	490	103	35	554	394	422	3.5	395	421	5.0	16	M 30	110	395	421

DIN 2634 PN25 DN200-500																		
400	406.4	8.8	40	550	110	36	620	446	474	3.5	447	473	5.0	16	M 33	120	447	473
500	508.0	10.0	44	660	125	36	730	548	576	3.5	549	575	5.0	20	M 33	130	549	575
DIN2636 PN63 DN10-40 / DIN 2637 PN100 DN10-40																		
DN	d1	s	b	k	h	d	D	di	da	f	di	da	f	Quant-ity	Thread	Lengt h	di	Da
10	17.2	2.0	20	70	45	14	100	23	35	2.5	24	34	4.0	4	M 12	55	24	34
15	21.3	2.0	20	75	45	14	105	28	40	2.5	29	39	4.0	4	M 12	55	29	39
20	26.9	2.6	22	90	48	18	130	35	51	2.5	36	50	4.0	4	M 16	60	36	50
25	33.7	2.6	24	100	58	18	140	42	58	2.5	43	57	4.0	4	M 16	65	43	57
32	42.4	2.9	24	110	60	22	150	50	66	2.5	51	65	4.0	4	M 20	70	51	65
40	48.3	2.9	26	120	62	22	170	60	76	2.5	61	75	4.0	4	M 20	70	61	75
DIN 2636 PN63 DN50-200																		
DN	d1	S	b	k	h	d	D	di	da	f	di	da	f	Quant-ity	Thread	Lengt h	di	da
50	60.3	2.9	26	135	62	22	180	72	88	2.5	73	87	4.0	4	M 20	75	73	87
65	76.1	3.2	26	160	68	22	205	94	110	2.5	95	109	4.0	8	M 20	75	95	109
80	88.9	3.6	28	170	72	22	215	101	121	2.5	106	120	4.0	8	M 20	75	106	120
100	114.3	4.0	30	200	78	26	250	128	150	3.0	129	149	4.5	8	M 24	90	129	149
125	139.7	4.5	34	240	88	30	290	154	176	3.0	155	175	4.5	8	M 27	100	155	175
150	168.3	5.6	36	280	95	33	340	182	204	3.0	183	203	4.5	8	M 30	110	183	203
200	219.1	7.1	42	340	110	36	410	238	260	3.0	239	259	4.5	12	M 33	120	239	259

60 Welding neck flanges - DIN EN 1092-1

- DIN EN - FL
- DIN EN - FL D
- DIN EN - FL C
- DIN EN - FL B1
- DIN- EN - FL B2
- FL - flange
- Form D - groove DIN EN 1092-1
- Form C - tongue DIN EN 1092-1
- Form B1 - raised face (Rz 50) DIN EN 1092-1
- Form B2 - raised face (Rz 12.5) DIN EN 1092-1

DN 10-150 DIN 2635 PN 40,
DN 200 DIN 2634 PN 25

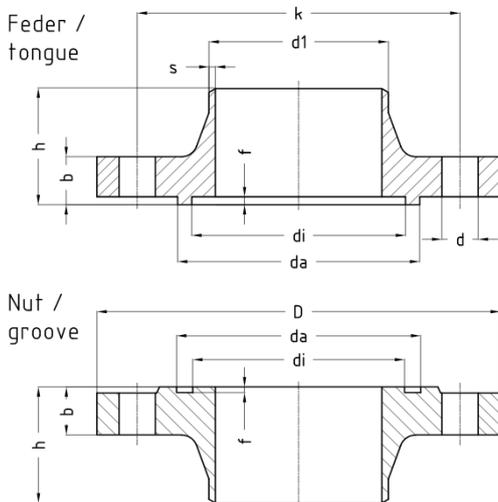

DIN2634 PN25 DN10-150 / DIN 2635 PN40 DN10-500

DN	Welding ends				Flange facing design											Screws			Sealing ring	
	Series 1		Series 2		Groove						Tongue					DIN 931			DIN 2691	
	d1	s	d1	s	b	k	h	d	D	d _i	d _a	f	d _i	d _a	f	Quant-ity	Thread	Lengt h	d _i	d _a
10	17.2	1.8	15.0	2.5	1 6	60	35	1 4	90	23	35	4. 0	24	34	4. 5	4	M 12	45	24	34
15	21.3	2.0	20.0	2.5	1 6	65	38	1 4	95	28	40	4. 0	29	39	4. 5	4	M 12	45	29	39
20	26.9	2.3	25.0	2.5	1 8	75	40	1 4	10 5	35	51	4. 0	36	50	4. 5	4	M 12	50	36	50
25	33.7	2.6	32.0	3.0	1 8	85	40	1 4	11 5	42	58	4. 0	43	57	4. 5	4	M 12	50	43	57


DIN2634 PN25 DN10-150 / DIN 2635 PN40 DN10-500																				
32	42.4	2.6	38.0	3.0	1 8	10 0	42	1 8	14 0	50	66	4. 0	51	65	4. 5	4	M 16	55	51	65
40	48.3	2.6	45.0	3.0	1 8	11 0	45	1 8	15 0	60	76	4. 0	61	75	4. 5	4	M 16	55	61	75
50	60.3	2.9	57.0	3.2	2 0	12 5	48	1 8	16 5	72	88	4. 0	73	87	4. 5	4	M 16	60	73	87
65	76.1	2.9	76.1	3.6	2 2	14 5	52	1 8	18 5	94	11 0	4. 0	95	10 9	4. 5	8	M 16	60	95	109
80	88.9	3.2	88.9	4.0	2 4	16 0	58	1 8	20 0	10 5	12 1	4. 0	10 6	12 0	4. 5	8	M 16	65	106	120
100	114.3	3.6	108.0	4.0	2 4	19 0	65	2 2	23 5	12 8	15 0	4. 5	12 9	14 9	5. 0	8	M 20	70	129	149
125	139.7	4.0	133.0	4.0	2 6	22 0	68	2 6	27 0	15 4	17 6	4. 5	15 5	17 5	5. 0	8	M 24	80	155	175
150	168.3	4.5	159.0	4.5	2 8	25 0	75	2 6	30 0	18 2	20 4	4. 5	18 3	20 3	5. 0	8	M 24	80	183	203
200	219.1	6.3			3 4	32 0	88	3 0	37 5	23 8	26 0	4. 5	23 9	25 9	5. 0	12	M 27	100	239	259
250	273.0	7.1			3 8	38 5	105	3 3	45 0	29 1	31 3	4. 5	29 2	31 2	5. 0	12	M 30	110	292	312
300	323.9	8.0			4 2	45 0	115	3 3	51 5	34 2	36 4	4. 5	34 3	36 3	5. 0	16	M 30	120	343	363
350	355.6	8.8			4 6	51 0	125	3 6	58 0	39 4	42 2	5. 0	39 5	42 1	5. 5	16	M 33	130	395	421
400	406.4	11.0			5 0	58 5	135	3 9	66 0	44 6	47 4	5. 0	44 7	47 3	5. 5	16	M 36	140	447	473
500	508.0	14.2			5 2	67 0	140	4 2	75 5	54 8	57 6	5. 0	54 9	57 5	5. 5	20	M 39	150	549	575

Table 49: Installation lengths in mm

61 Welding neck flanges - DIN EN 1092-1

- DIN EN - FL
- DIN EN - FL D
- DIN EN - FL C
- DIN EN - FL B1
- DIN- EN - FL B2
- FL - flange
- Form D - groove DIN EN 1092-1
- Form C - tongue DIN EN 1092-1
- Form B1 - raised face (Rz 50) DIN EN 1092-1
- Form B2 - raised face (Rz 12.5) DIN EN 1092-1

DN 10-150 DIN 2635 PN 40,
DN 200 DIN 2634 PN 25

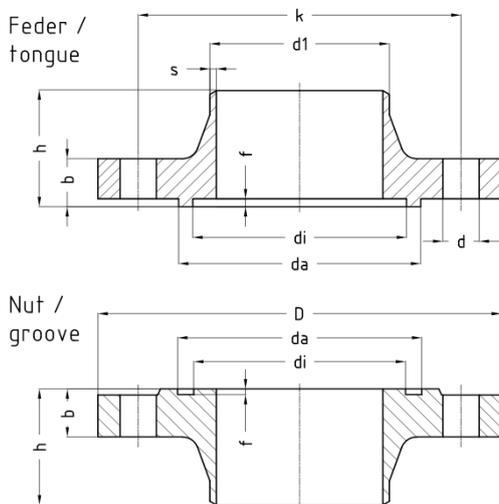

Installation lengths in mm:


DIN EN 1092-1 PN25 DN200-500																			
Welding ends			Flange facing design											Screws			Sealing ring		
Series 1			Groove						Tongue					DIN 931			DIN 2691		
DN	d1	s	b	k	h	d	D	di	da	f	di	da	f	Quantity	Thread	Length h	di	da	
200	219.1	6.3	30	310	80	26	360	238	260	4.5	239	259	5.0	12	M 24	90	239	259	
250	273.0	7.1	32	370	88	30	425	291	313	4.5	292	312	5.0	12	M 27	90	292	312	
300	323.9	8.0	34	430	92	33	485	342	364	4.5	343	363	5.0	16	M 27	100	343	363	
350	355.6	8.0	38	490	100	35	554	394	422	5.0	395	421	5.5	16	M 30	110	395	421	

DIN EN 1092-1 PN25 DN200-500																		
400	406.4	8.8	40	550	110	36	620	446	474	5.0	447	473	5.5	16	M 33	120	447	473
500	508.0	10.0	44	660	125	36	730	548	576	5.0	549	575	5.5	20	M 33	130	549	575
DIN EN 1092-1 PN63 DN10-40 / PN100 DN10-40																		
DN	d1	s	b	k	h	d	D	di	da	F	di	da	f	Quantity	Thread	Length	di	Da
10	17.2	2.0	20	70	45	14	100	23	35	4.0	24	34	4.5	4	M 12	55	24	34
15	21.3	2.0	20	75	45	14	105	28	40	4.0	29	39	4.5	4	M 12	55	29	39
20	26.9	2.6	22	90	48	18	130	35	51	4.0	36	50	4.5	4	M 16	60	36	50
25	33.7	2.6	24	100	58	18	140	42	58	4.0	43	57	4.5	4	M 16	65	43	57
32	42.4	2.9	24	110	60	22	150	50	66	4.0	51	65	4.5	4	M 20	70	51	65
40	48.3	2.9	26	120	62	22	170	60	76	4.0	61	75	4.5	4	M 20	70	61	75
DIN EN 1092-1 PN63 DN50-125																		
DN	d1	S	b	k	h	d	D	di	da	f	di	da	F	Quantity	Thread	Length	di	da
50	60.3	2.9	26	130	62	22	180	72	88	4.0	73	87	4.5	4	M 20	75	73	87
65	76.1	3.2	26	160	68	22	205	94	110	4.0	95	109	4.5	8	M 20	75	95	109
80	88.9	3.6	28	170	72	22	215	105	121	4.0	106	120	4.5	8	M 20	75	106	120
100	114.3	4.0	30	200	78	26	250	128	150	4.5	129	149	5.0	8	M 24	90	129	149
125	139.7	4.5	34	240	88	30	290	154	176	4.5	155	175	5.0	8	M 27	100	155	175
150	168.3	5.6	36	280	95	33	340	182	204	4.5	183	203	5.0	8	M 30	110	183	203
200	219.1	7.1	42	340	110	36	410	238	260	4.5	239	259	5.0	12	M 33	120	239	259

62 Welding neck flanges - ANSI B16.5 raised face

ANSI-FL

- ANSI-FL 150lbs RF
- ANSI-FL 300lbs RF
- FL - flange
- Facing with large and small male / female
- Facing with large and small tongue / groove according to ANSI B16.5

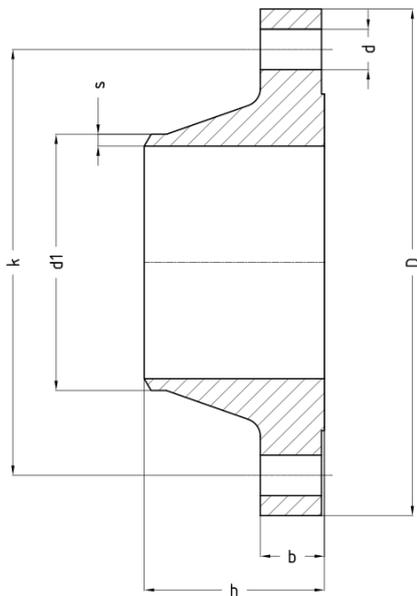

Installation lengths in mm:

Nominal size		Welding ends acc. to:													
DN	INCH	ANSI		ANSI-FL 150lbs RF / sq. in				Screws DIN 931		ANSI-FL 300lbs RF / sq. in				Screws DIN 931	
		d1	s	b	k	h	d	D	Quantity	B	k	h	d	D	Quantity
15	1/2"	21.3	2.8	11.6	60.3	48	15.7	90	4	14.7	66.7	53	15.7	95	4
20	3/4"	26.7	2.9	13.2	69.9	53	15.7	100	4	16.3	82.6	58	19.0	115	4
25	1"	33.4	3.4	14.7	79.4	56	15.7	110	4	17.9	88.9	62	19.0	125	4
32	1 1/4"	42.2	3.6	16.3	88.9	58	15.7	115	4	19.5	98.4	66	19.0	135	4
40	1 1/2"	48.3	3.7	17.9	98.4	62	15.7	125	4	21.1	114.3	69	22.3	155	4
50	2"	60.3	3.9	19.5	120.7	64	19.1	150	4	22.7	127.0	70	19.0	165	6
65	2 1/2"	73.0	5.2	22.7	139.7	70	19.1	180	4	25.9	149.2	77	22.3	190	8
80	3"	88.9	5.5	24.3	152.4	70	19.1	190	4	29.0	168.3	80	22.3	210	8
100	4"	114.3	6.0	24.3	190.5	77	19.1	230	8	32.2	200.0	86	22.3	255	8
125	5"	141.3	6.6	24.3	215.9	89	22.4	255	8	35.4	235.0	99	22.3	280	8
150	6"	168.3	7.1	25.9	241.3	89	22.4	280	8	37.0	269.9	99	22.3	320	12
200	8"	219.1	8.2	29.0	298.5	102	22.4	345	8	41.7	330.2	112	25.4	380	12

Nominal size		Welding ends acc. to:													
250	10"	273.0	9.3	30.6	362.0	102	25.4	405	12	48.1	387.4	118	28.4	445	16
300	12"	323.8	10.3	32.2	431.8	115	25.4	485	12	51.3	450.8	131	31.7	520	16
350	14"	355.6	11.1	35.4	476.3	127	28.4	535	12	54.4	514.4	143	31.7	585	20
400	16"	406.4	12.7	37.0	539.8	127	28.4	595	16	57.6	571.5	146	35.0	650	20
500	20"	508.0	15.1	43.3	635.0	145	31.8	700	20	64.0	685.8	162	35.0	775	24

63 Welding neck flanges - AWP

- AWP-FL
- AWP-FL N
- AWP-FL F
- FL - flange
- N - groove
- F - tongue

AWP-FL PN25 DN10-20 / PN40 DN25-80																												
Welding ends										Flange facing design										Screws DIN 931			Sealing ring DIN 2691					
Series 1		Series 2		ANSI												Groove				Tongue				Quant- ity	Thread	Lengt h		
D	d1	s	d1	s	d1	s	b	k	r	h1	ds	di	da	f1	h2	di	da	f2	h3				di	da				
10	17.2	1.80	15.0	2.51	17.1	2.3	88	60	13	16	14	28	40	3	31.5	29	39	4	32.0	2				M 12	45	29	39	
15	21.3	2.00	20.0	2.53	21.3	2.8	88	60	13	16	14	28	40	3	31.5	29	39	4	32.0	2				M 12	45	29	39	
20	26.9	2.30	25.0	2.57	26.7	2.9	88	60	13	16	14	28	40	3	31.5	29	39	4	32.0	2				M 12	45	29	39	
25	33.7	2.60	32.0	3.04	33.4	3.4	92	85	15	18	14	42	58	3	44.0	43	57	4	44.0	4				M 12	50	43	57	
32	42.4	2.60	38.0	3.02	42.2	3.6	92	85	15	18	14	42	58	3	44.0	43	57	4	44.0	4				M 12	50	43	57	
40	48.3	2.60	45.0	3.03	48.3	3.7	92	85	15	18	14	42	58	3	38.5	43	57	4	38.5	4				M 12	50	43	57	
50	60.3	2.90	57.0	3.23	60.3	3.9	132	135	20	28	18	84	96	3	43.0	85	95	4	43.0	4				M 16	75	A85x95*		
65	76.1	2.91	76.1	3.60	73.0	5.2	132	135	20	28	18	84	96	3	53.5	85	95	4	53.5	4				M 16	75	A85x95*		
80	88.9	3.29	88.9	4.09	88.9	5.5	132	135	20	28	18	84	96	3	53.5	85	95	4	53.5	4				M 16	75	A85x95*		

Table 50: Installation lengths

* = acc. to DIN 7603

64 Legal notices

- GEA AWP valves must be handled in accordance with the GEA AWP operating regulations.
- The safety instructions mentioned in the operating regulations must be observed.
- A hazard analysis is available for GEA AWP valves.
- GEA AWP valves must only be handled by authorised persons.
- The instructions for the use of personal protective equipment (PPE) must be observed.
- GEA AWP valves must be used for their intended purpose.
- This catalogue has been carefully created and checked; however, it may still contain errors. The technical specifications given in the catalogue are not contractually guaranteed properties. Technical specifications are only binding if they have been confirmed by us in writing.
- We reserve the right to make technical changes.
- Further information on our declarations of conformity, operating regulations, calculation software and the general terms and conditions can be found on our website www.awpvalves.com under the Tools/Downloads tab.
- Our general terms and conditions apply.

GEA AWP GmbH
Armaturenstr. 2
17291 Prenzlau
Germany
phone: +49 3984 8559-0
fax: +49 3984 8559-18
e-mail: info@awpvalves.com

